
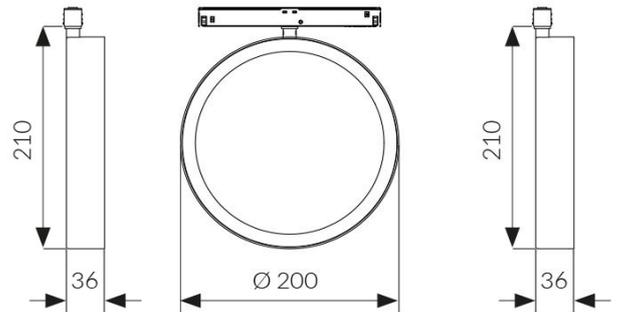


BEN LV

Fixture for low voltage track. CRI>90



CODE		FLUX	SIZE	CERTIFICATIONS
10PG12K3LV	12W 3000K	879lm	200x210mm	  

Optics

Impact resistant satin polycarbonate diffuser.

Body

Aluminum with epoxy powder coating.

Technical features

- 48V DC operation
- SMD LED technology
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000
- 5 years warranty

Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97

