


BEN MEDIUM IP40 PG Double Emission

Frosted Acryl-Satiné impact resistant.

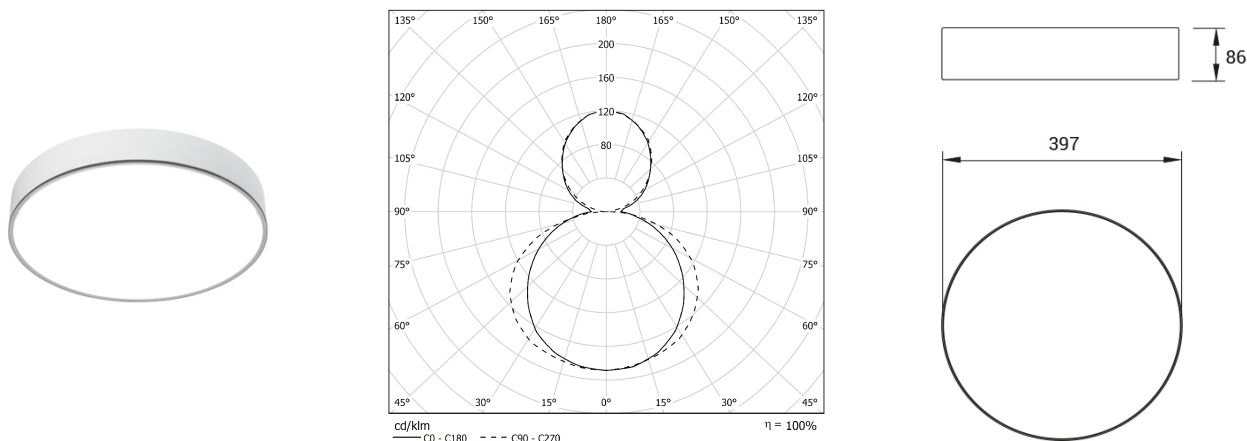

CODE		FLUX	SIZE	CERTIFICATIONS
10DI24PGK3D	24W: 15W+9W 3000K	3493lm	Ø 397mm	CE IP 40 LED ENERGY EFFICIENCY CLASS 

Optics

PG diffuser with frosted Acryl-Satiné and impact resistant diffuser UGR<22. Direct/indirect emission.

Body

Aluminum with epoxy powder coating.

Technical features

- Built-in driver
- CRI >90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h
- 5 years warranty

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

Matte white RAL 9003 - code B
Other Colors - on request

Wiring

D: Standard wiring is 220-240V, DALI dimmable