


BEN Medium IP54

Frosted Acryl-Satiné impact resistant with perimeter silk-screen printing.

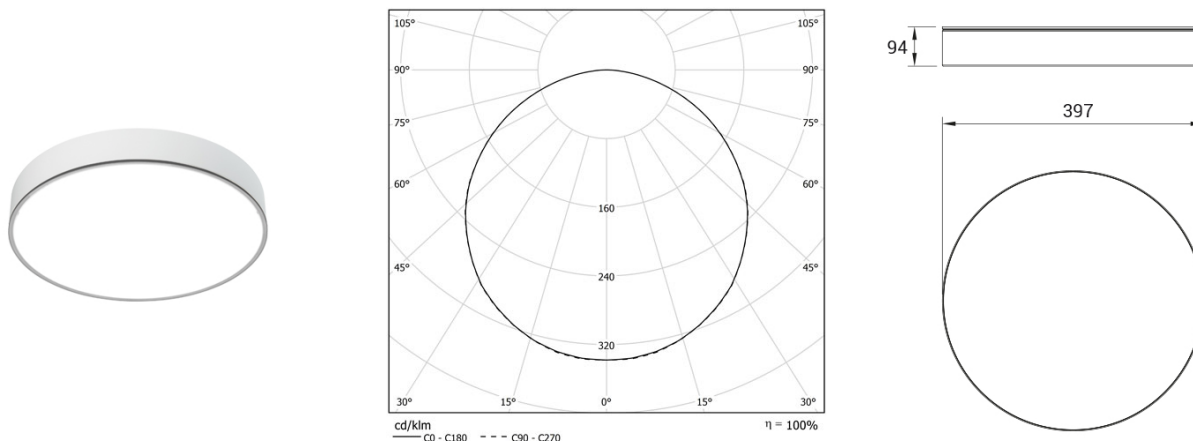

CODE		FLUX	SIZE	CERTIFICATIONS
10PG21K354EM	21W 3000K	2684lm	Ø 397mm	CE IP 44 IP 54 LED ENERGY EFFICIENCY CLASS 

Optics

Impact resistant satin-acrylic diffuser with perimeter screen printing, UGR<22.

Body

Aluminum with epoxy powder coating.

Technical features

- Built-in driver
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B20 >80.000h
- 5 years warranty

Ingress Protection rating

In case of suspended use, the degree of protection passes from IP54 to IP44.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Colors

White RAL 9003 - code B

Black RAL 9005 - code C8

Other Colors - on request

Wiring

EM: Built-in wiring 230-240V/50-60Hz with power factor >0.97 with 1h emergency block.