

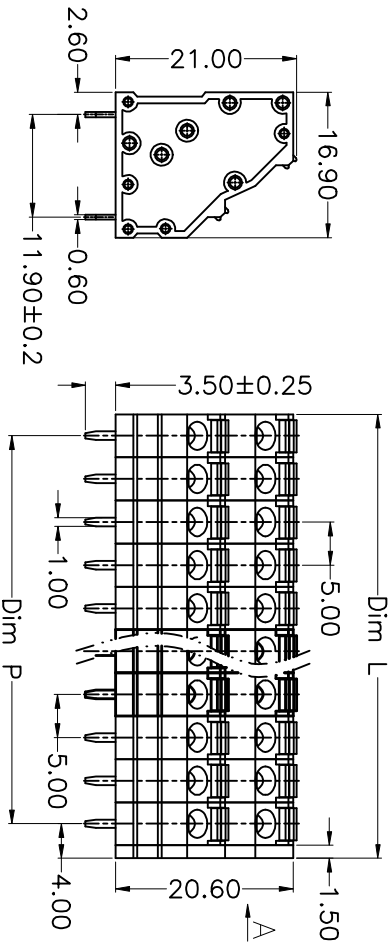


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2019/6/11	ZHANG	JIN

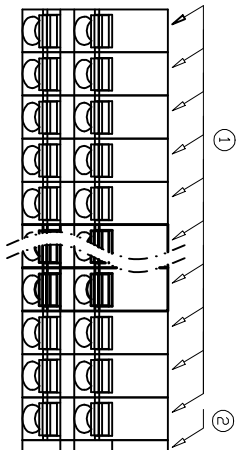

**A SIDE
(W/O) COVER**


- Material
 - ØHousing : PA66, UL94V-0
 - ØCover : PA66, UL94V-0
 - ØButton : PA66+15GF, UL94V-0
 - ØReed : Stainless steel
 - ØPin header : Copper, Tin plated

- Electrical UL IEC
 - Rated voltage : 300V 320V
 - Rated current : 10A 17.5A
 - Insulation resistance: 500MΩ/DC500V
 - Withstanding Voltage : AC2000V/1min
 - Wire range: 26-16AWG 1.5mm²


- Mechanical
 - Operating temperature: -40°C~+105°C
 - Soldering temperature: 250°C±5/5sec
 - Strip length: 9-10mm

HOW TO ORDER

KF550H-5.00-2*XXP-1 X-XXXXXX

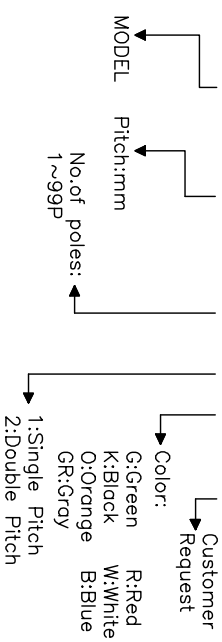

PCB LAYOUT

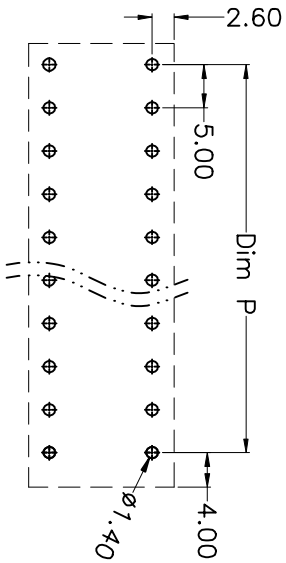

N=Number of Poles
Dim P=(N-1)x5.00
Dim L=Nx5.00+1.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE	ANGLE TOLERANCE
X: ±0.5	X: ±5°
.X: ±0.3	.X: ±3'
.XX: ±0.1	.XX: ±1'

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS mm	KF550H-5.00-2*XXP
SHEET SIZE A4	SERIES KF550H

KF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD