


## MOON INTELLIGENT

Impact resistant polycarbonate diffuser. Built-in presence sensor.

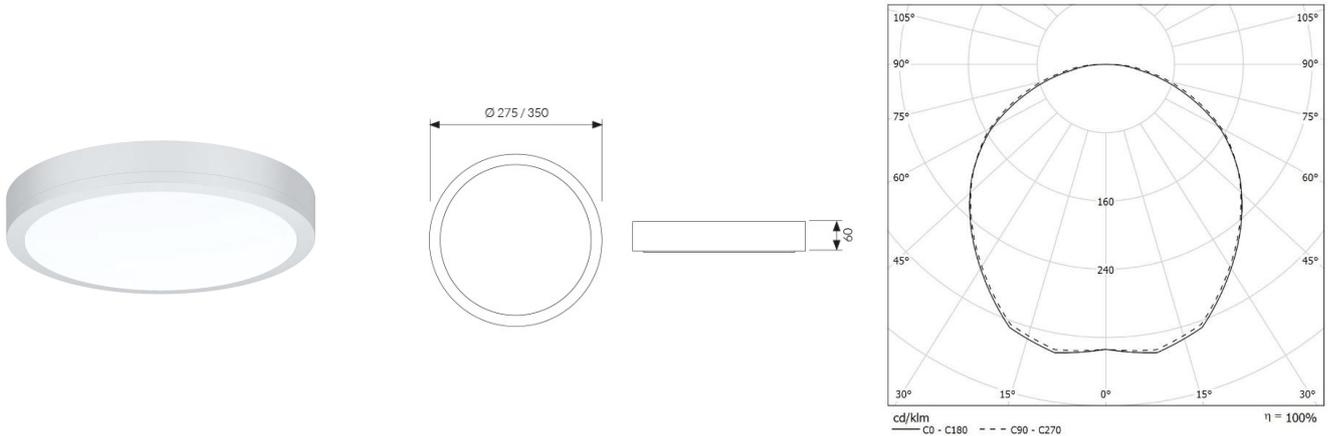

CODE		FLUX	SIZE	CERTIFICATIONS
51PO18K3M65I	18W 3000K	1921lm	Ø 275mm	  

### Optics

Impact resistant polycarbonate diffuser. Built-in presence sensor.

### Body

Polycarbonate.

### Technical features

- SMD LED technology
- Built-in driver
- CRI >80
- Eye safety: RG0
- Mac Adams 3
- L80/B10 >50.000h
- -25°-> +40°/45°
- 750°: resistant to glow wire test
- 5 years warranty

### Legal References

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Colors

White RAL 9003 - code B  
Black RAL 9005 - code C8  
Other Colors - on request

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97