



PA350 - 3.81

Rising clamp terminal block




Technical data

	IEC	UL / CSA	
Pitch	3.81 mm	0.15"	
Poles		2, 3	
Versions		VE vertical	
Ratings	125V - 13.5A	125V - 10A	
Wire size	1.0 sqmm	22 ÷ 16 AWG	
Working Temperature	-5 ÷ 85 °C (short time 115 °C)	23 ÷ 221 °F	
Plastic Material	Green Polyamide PA6.8, UL94-VO, CTI600V, GWT960 °C		
Metal Parts	Soldering pin made in tin plated brass; Cage insert made in nickel plated brass; M2 Screw made in zinc plated steel		
Screw Torque	0.5 Nm	7 lb-in	
Accessories			
Approvals	File Nr.	Ratings (sqmm/AWG - V - A - T)	Standard References
	EI 629	1.0sqmm - 125V - 13.5A - 85 °C	EN60998-1; EN60998-2-1
	5699 ÜG	1.0sqmm - 125V - 13.5A - 85 °C	DIN EN60998-1; DIN EN60998-2-1 (VDE 0613)

Dimensional drawing

I dati tecnici possono essere modificati senza preavviso. / The technical data can be subject to changes without notice.

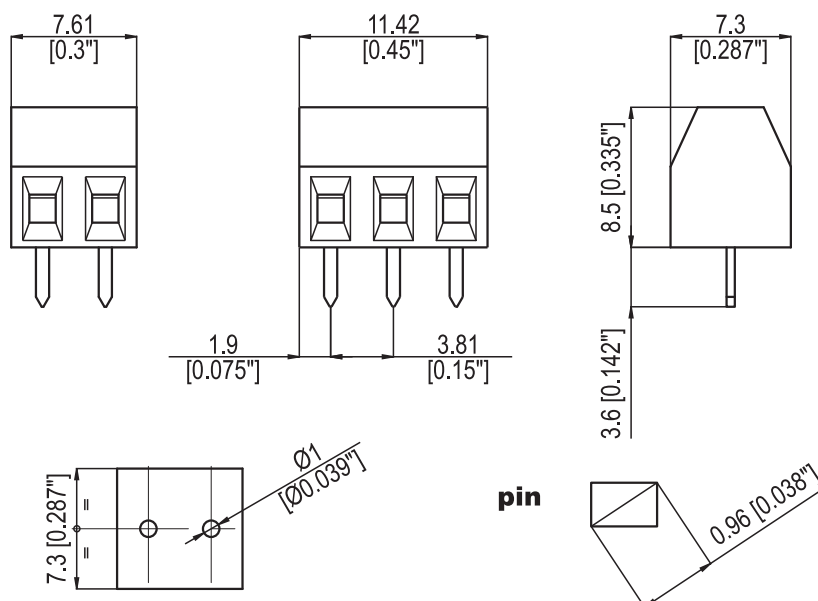

pin



PA350 - 3.81

Packaging

Type	P-N	Pack
PA 350/3.81/2	00113002	250
PA 350/3.81/3	00113003	250

Pallets

Europallets