

NIKKO+45 LED DA



Part number	303102
Lampholder:	LED
Light Source:	LED
Wattage:	15 W
Finish:	WH-87 / White / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK06 1J xx3
CRI:	80
Kelvin:	3000
Power factor:	$\text{COS}\phi \geq 0,9$
Optic:	SYMMETRIC EXTRA WIDE REFLECTOR
Lightsource lumen output:	1086 lm
Luminaire lumen output:	843 lm
L:	L80
B:	B10
Lifetime:	50000 h
Ta MIN luminaire:	-10°
Ta MAX luminaire:	35°





Description

Photometric data

Technical drawings


Wall, ceiling, bracket and post mounted luminaire for indoor and outdoor lighting, comprising:

- Die-cast painted aluminium housing and trim
- Pressed glass diffuser, white painted inside, secured with the ring
- Foam silicone gasket
- Stainless steel locking screws
- DA versions are dual power switch versions, designed with two drivers arranged in parallel. Requires two separate lines
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

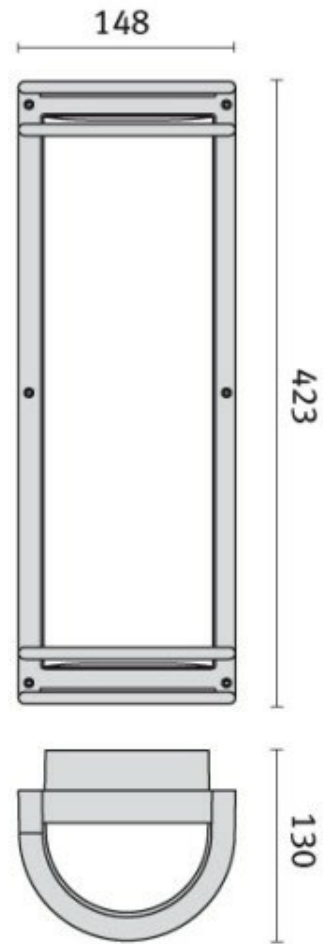


OPTIONAL ACCESSORIES


NIKKO+45




000440
Wall bracket 45



000444
Post 45 H410



000448
Post 45 H800



000452
Post 45 H1200