



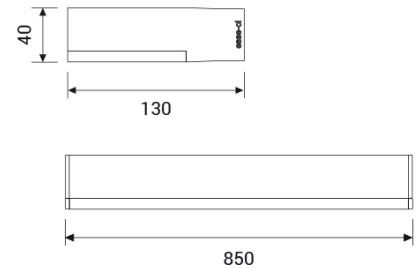



UPLIK WALL Long Double emission

PG diffuser (UGR<22). Double emission: direct/indirect.

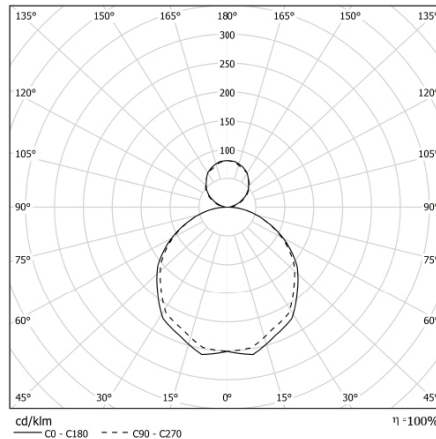

CODE		LIGHT STREAM	SIZE	CERTIFICATIONS
76DI144L3XPL	144W 500mA 3000K	11052lm	850mm	  

Optic

Lower methacrylate satin antistatic diffuser screen, UGR<22. LIC (Lateral indirect Control) technology and upper PG protective diffuser for dual emission: direct / indirect.

Specifications

Integrated Driver
CRI>80
Mac Adams 3
Life Time: L80/B50 >50.000h
5 years complete warranty
Eye safety: risk-free (RG 0) in accordance with EN62471:2009

Body

Aluminum extruded body with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.