



40mm sq.**San Ace 40****General Specifications**

- Material Frame: Plastics (Flammability: UL94V-0),
Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (L10:Survival rate:90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black or blue (Sensor) yellow
- Storage Temperature -30°C to +70°C (Non-condensing)

40×40×15mm (Mass : 32g) **9P type****Specifications** The following nos. **have pulse sensors and ribs.**

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
109P0405H701	5	4.5 to 5.5	0.28	1.4	7,700	0.18	6.4	75.5	0.303	28
109P0405M701			0.21	1.05	6,500	0.15	5.3	53	0.213	24
109P0412R701	12	7 to 13.8	0.13	1.56	9,700	0.227	8.0	111.9	0.449	34
109P0412S701		10.2 to 13.8	0.18	2.16	8,600	0.2	7.06	92.1	0.369	32
109P0412H701			0.13	1.56	7,700	0.18	6.4	75.5	0.303	28
109P0412M701			0.095	1.14	6,500	0.15	5.3	53	0.213	24
109P0424H701	24	20.4 to 27.6	0.08	1.92	7,700	0.18	6.4	75.5	0.303	28

Models without sensors or with lock sensors are available as options. Please refer to the index (pp. 466 to 467).

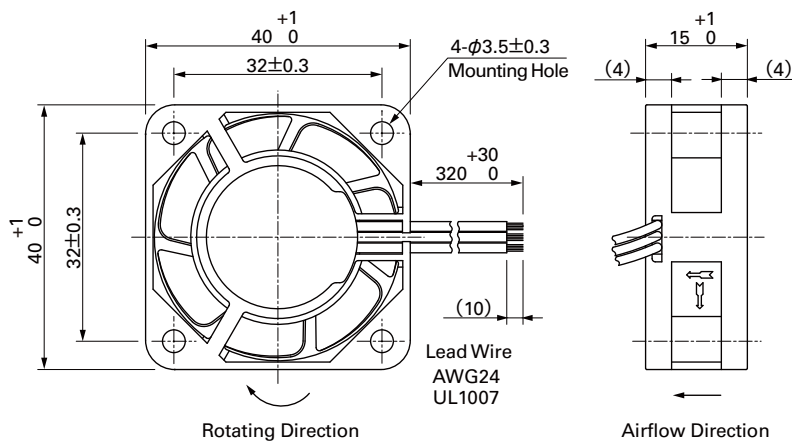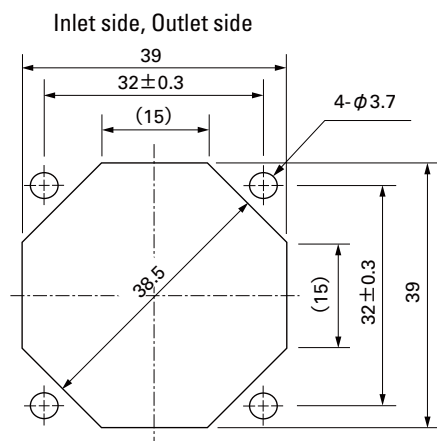Dimensions (unit: mm)**Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)**


Options (unit: mm)

Finger Guards

Model : 109-059 Surface treatment : Nickel-chrome plating (silver)
 : 109-059H : Cation electropainting (black)


Color

Inlet side, Outlet side

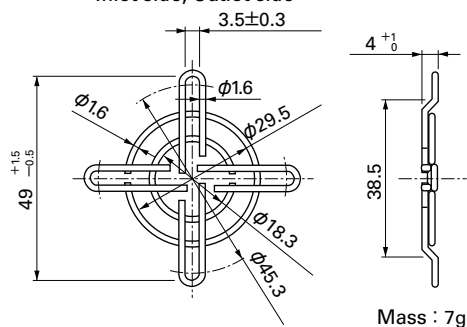


Mass : 7g


Airflow - Static Pressure Characteristics

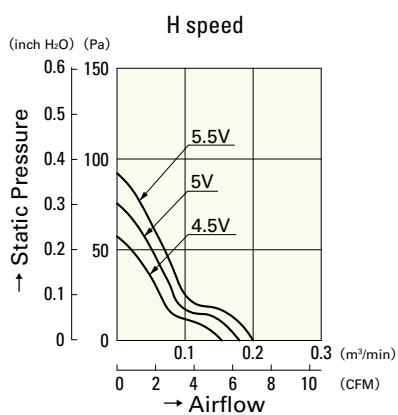


109P0405H701

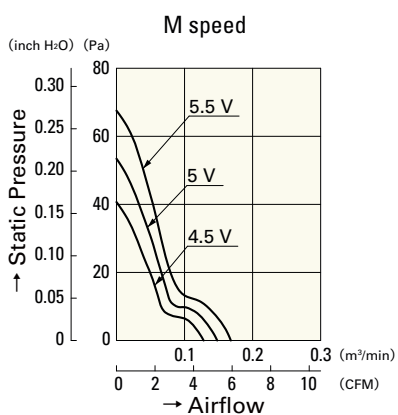


109P0405M701

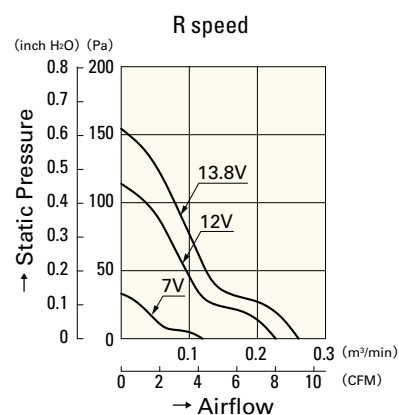


109P0412R701

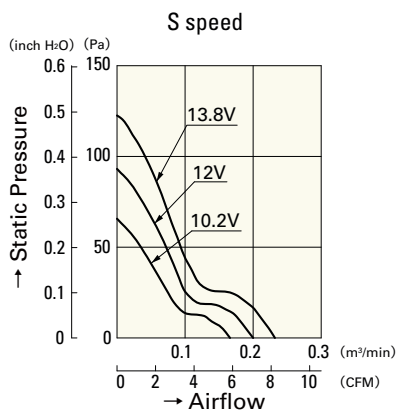

109P0412S701

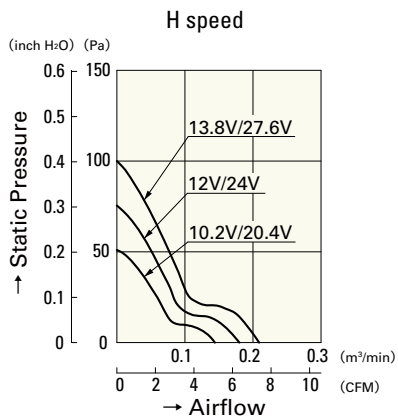

109P0412H701
109P0424H701

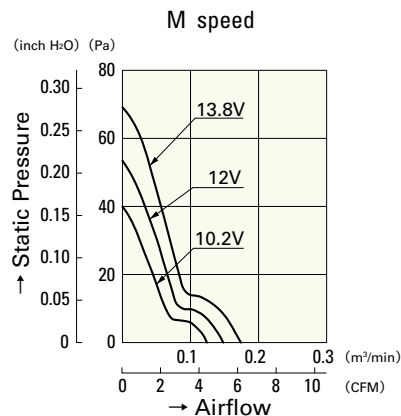

109P0412M701