


FUSIBILI DA C.S.

PCB fuses | Fusibles pour C.I.

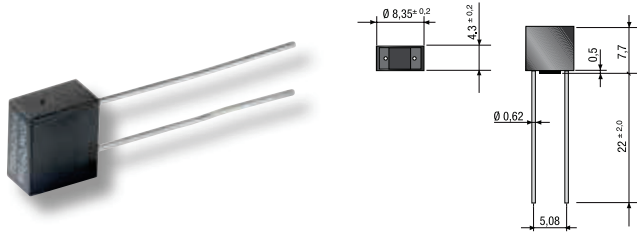

MICROFUSIBILI MSF 785

MSF 785 microfuses | Microfusibles MSF 785


| | | |
|---|-------------------------------------|--|
| Dimensioni 8,35x7,7 mm | Dimensions 8,35x7,7 mm | Dimensions 8,35x7,7 mm |
| Caratteristica F= rapido | Characteristic F= fast | Caractéristique F= rapide |
| Tensione 250 V | Voltage 250 V | Tension 250 V |
| Capacità di rottura L 35 A | Breaking capacity L 35 A | Pouvoir de coupure L 35 A |
| Corpo Termoplastico | Body Thermoplastic | Corps Thermoplastique |
| Terminali Rame stagnato | Leads Tinned copper | Fils de connexion Cuivre étamé |
| Norme riferimento IEC 60127-3/III | Standards IEC 60127-3/III | Normes IEC 60127-3/III |



TEMPI DI FUSIONE | Time current | Temps de fusion


| Corrente nominale In Rated current Courant nominal | Corrente di prova Test current Courant d'essai | | | | |
|--|--|----------------------|-------------------------------|---------------------------------|---------------------|
| | 1,5xIn | 2,1xIn | 2,75xIn | 4xIn | 10xIn |
| 50 mA - 5 A | min 1 h | max 30 min | min max 10 ms - 3 s | min max 3 ms - 300 ms | max 20 ms |
| 6,3 A | 1 h | 30 min | 10 ms - 5 s | 3 ms - 300 ms | 20 ms |

| Corrente nom. | Codice | Resistenza | Caduta tensione mV | I ² t |
|----------------------------------|--------------|--------------------------|----------------------------------|--------------------------------------|
| Rated current Courant nominal | Code Code | Resistance Résistance | Voltage drop Chute de tension | I ² t I ² t |
| 50 mA | MSF785050 | 4,1970 | 850 | 0,000675 |
| 63 mA | MSF785063 | 2,8020 | 750 | 0,001429 |
| 80 mA | MSF785080 | 1,7100 | 650 | 0,007258 |
| 100 mA | MSF785110 | 1,1600 | 600 | 0,009000 |
| 125 mA | MSF785112 | 1,0002 | 550 | 0,012656 |
| 160 mA | MSF785116 | 1,4923 | 500 | 0,023040 |
| 250 mA | MSF785125 | 0,7007 | 440 | 0,081563 |
| 315 mA | MSF785131 | 0,3820 | 400 | 0,093768 |
| 800 mA | MSF785180 | 0,225 | 300 | 0,192000 |
| 1 A | MSF785210 | 0,1655 | 279 | 0,300000 |
| 1,25 A | MSF785212 | 0,1165 | 243,5 | 0,468700 |
| 1,6 A | MSF785216 | 0,076 | 210 | 0,896000 |
| 2 A | MSF785220 | 0,0555 | 193,5 | 1,200000 |
| 2,5 A | MSF785225 | 0,046 | 201 | 2,500000 |
| 3,15 A | MSF785231 | 0,0315 | 168 | 3,969000 |
| 4 A | MSF785240 | 0,0223 | 153,5 | 7,200000 |
| 5 A | MSF785250 | 0,016 | 154,125 | 15,000000 |
| 6,3 A | MSF785263 | 0,0145 | 156,5 | 47,628000 |



bandoliera 1.000 pz
reel 1.000 pcs
bande 1.000 pces

pronta
in stock
en stock

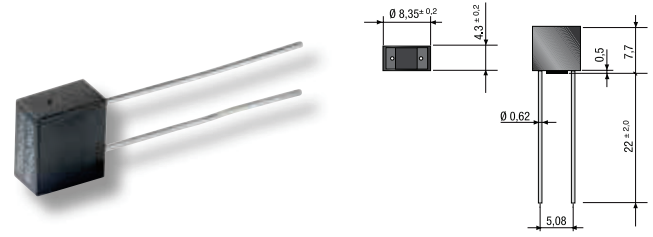

MICROFUSIBILI MST 785

MST 785 microfuses | Microfusibles MST 785

| | | |
|--|---------------------------------------|--|
| Dimensioni 8,35x7,7 mm | Dimensions 8,35x7,7 mm | Dimensions 8,35x7,7 mm |
| Caratteristica T=ritardato | Characteristic T=time delay | Caractéristique T=temporisé |
| Tensione 250 V | Voltage 250 V | Tension 250 V |
| Capacità di rottura L 35 A | Breaking capacity L 35 A | Pouvoir de coupure L 35 A |
| Corpo Termoplastico | Body Thermoplastic | Corps Thermoplastique |
| Terminali Rame stagnato | Leads Tinned copper | Fils de connexion Cuivre étamé |
| Norme riferimento IEC 60127-3/IV | Standards IEC 60127-3/IV | Normes IEC 60127-3/IV |



TEMPI DI FUSIONE | Time current | Temps de fusion

| Corrente nominale In Rated current Courant nominal | Corrente di prova Test current Courant d'essai | | | | |
|--|--|---------------------|---------------------------------|--------------------------------|----------------------------------|
| | 1,5xIn | 2,1xIn | 2,75xIn | 4xIn | 10xIn |
| 40 mA - 400 mA | min 1 h | max 2 min | min max 400 ms - 10 s | min max 150 ms - 3 s | min max 20 ms - 150 ms |
| 500 mA - 6,3 A | 1 h | 2 min | 400 ms - 10 s | 150 ms - 3 s | 20 ms - 150 ms |

| Corrente nom. | Codice | Resistenza | Caduta tensione mV | I ² t |
|----------------------------------|--------------|--------------------------|-------------------------------------|--------------------------------------|
| Rated current Courant nominal | Code Code | Resistance Résistance | Voltage drop Chute de tension mV | I ² t I ² t |
| * 40 mA | MST785040 | 12,864 | 600 | 0,0158 |
| * 50 mA | MST785050 | 8,9000 | 550 | 0,0225 |
| * 63 mA | MST785063 | 5,4053 | 500 | 0,0446 |
| * 80 mA | MST785080 | 3,6870 | 480 | 0,0634 |
| *100 mA | MST785110 | 2,4063 | 350 | 0,1080 |
| *125 mA | MST785112 | 1,6194 | 300 | 0,1223 |
| *160 mA | MST785116 | 1,2458 | 280 | 0,2444 |
| *200 mA | MST785120 | 0,8240 | 260 | 0,3060 |
| *250 mA | MST785125 | 0,6300 | 240 | 0,6019 |
| *315 mA | MST785131 | 0,3800 | 220 | 0,8216 |
| *400 mA | MST785140 | 0,2700 | 200 | 1,4832 |
| *500 mA | MST785150 | 0,2575 | 151,5 | 1,7900 |
| *630 mA | MST785163 | 0,1400 | 100,5 | 1,5100 |
| *800 mA | MST785180 | 0,1180 | 110,5 | 4,2100 |
| • 1 A | MST785210 | 0,08075 | 94,5 | 7,4000 |
| • 1,25 A | MST785212 | 0,0624 | 93,5 | 12,7500 |
| • 1,6 A | MST785216 | 0,0410 | 71,5 | 23,0000 |
| • 2 A | MST785220 | 0,03115 | 75 | 29,8000 |
| • 2,5 A | MST785225 | 0,02430 | 74,5 | 40,3000 |
| • 3,15 A | MST785231 | 0,01675 | 62,5 | 67,0000 |
| • 4 A | MST785240 | 0,01275 | 65,4 | 87,0000 |
| • 5 A | MST785250 | 0,00735 | 43 | 120,0000 |
| • 6,3 A | MST785263 | 0,0074 | 59 | 176,0000 |

! non omologato
not approved
non homologué

! non omologato
not approved
non homologué



bandoliera 1.000 pz
reel 1.000 pcs
bande 1.000 pces

pronta
in stock
en stock