


SERIE DO
DO series | Série DO

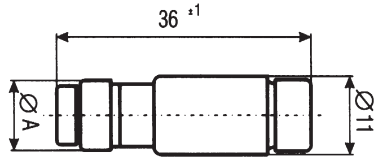

FUSIBILI DO1 gG
DO1 gG fuses | Fusibles DO1 gG

Tensione
400 V (250 Vdc)

Capacità di rottura
50.000 A (ac)

Classe di isolamento
B - VDE 0110

Norme riferimento
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

Per basi
E 14

Voltage
400 V (250 Vdc)

Breaking capacity
50.000 A (ac)

Insulating class
B - VDE 0110

Standards
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

For fuse bases
E 14

Tension
400 V (250 Vdc)

Pouvoir de coupure
50.000 A (ac)

Classe d'isolation
B - VDE 0110


Normes
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

Pour bases
E14



Corrente nominale Rated current Courant nominal	Codice Code Code	Colore Colour Couleur	Peso g. Weight Poids g.	ØA ØA ØA
2 A	NN1G002	■	6	7,3
4 A	NN1G004	■	6	7,3
6 A	NN1G006	■	6	7,3
10 A	NN1G010	■	6	8,5
13 A	NN1G013	■	6	8,5
16 A	NN1G016	■	6	9,7


Caratteristiche di fusione | Time current characteristics | Caracteristiques de fusion

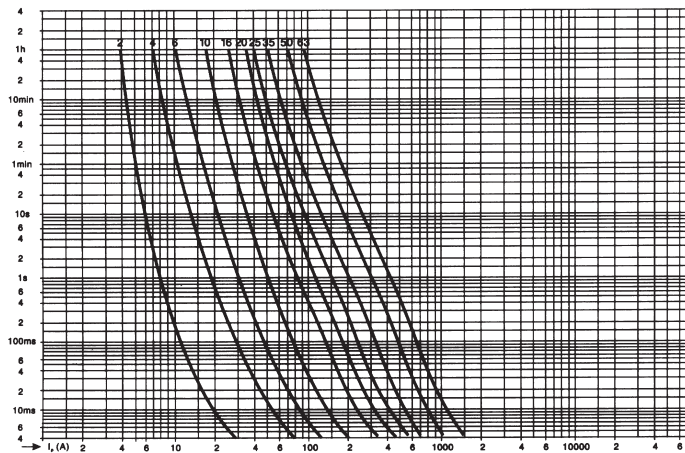

10/500 pz
10/500 pcs
10/500 pces



pronta
in stock
en stock

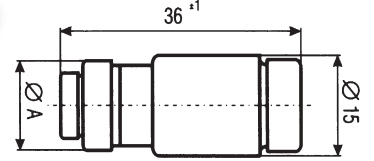

FUSIBILI DO2 gG
DO2 gG fuses | Fusibles DO2 gG

Tensione
400 V (250 Vdc)

Capacità di rottura
50.000 A (ac)

Classe di isolamento
B - VDE 0110

Norme riferimento
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

Per basi
E 18

Voltage
400 V (250 Vdc)

Breaking capacity
50.000 A (ac)

Insulating class
B - VDE 0110

Standards
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

For fuse bases
E 18

Tension
400 V (250 Vdc)

Pouvoir de coupure
50.000 A (ac)

Classe d'isolation
B - VDE 0110


Normes
IEC 60269-3-1
DIN VDE 0636-301
DIN EN 60269.1/3
EN 60947-1/60947-3

Pour bases
E18



Corrente nominale Rated current Courant nominal	Codice Code Code	Colore Colour Couleur	Peso g. Weight Poids g.	ØA ØA ØA
20 A	NN2G020	■	11	10,9
25 A	NN2G025	■	12	12,1
32 A	NN2G032	■	13	13,3
35 A	NN2G035	■	13	13,3
40 A	NN2G040	■	13	13,3
50 A	NN2G050	□	13	14,5
63 A	NN2G063	■	15	15,9

Caratteristiche di fusione | Time current characteristics | Caracteristiques de fusion

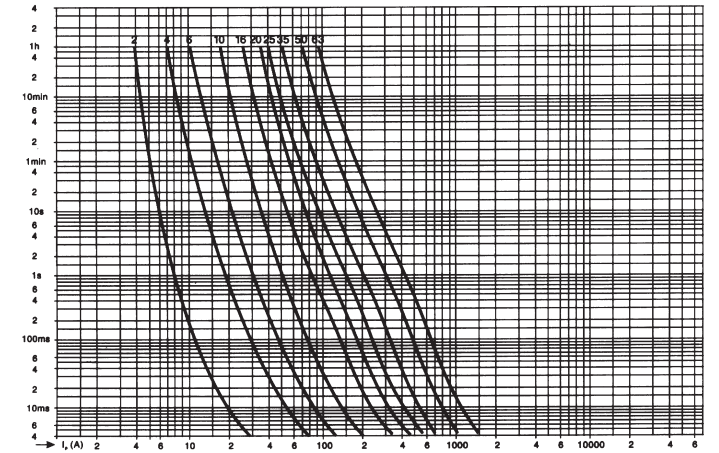

10/500 pz
10/500 pcs
10/500 pces



pronta
in stock
en stock