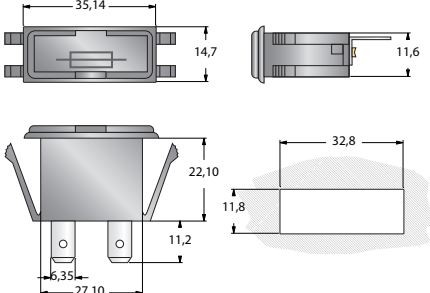
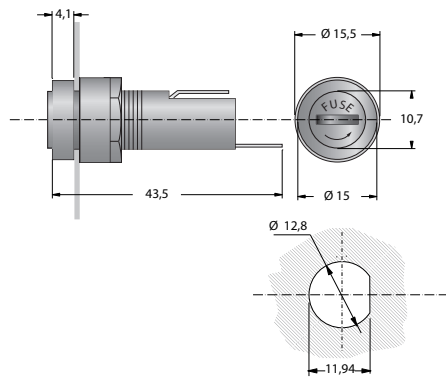
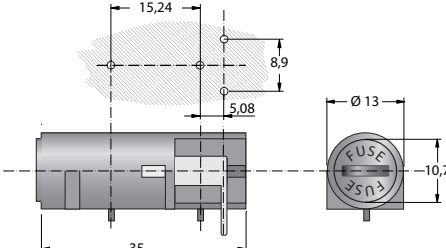


PORTAFUSIBILI TOUCHPROOF 5x20

Touchproof fuseholders for 5x20 fuses | Porte-fusibles 5x20 antichocs

P0430	Per fusibili 5x20	For 5x20 fuses	Pour fusibles 5x20	
	250 V Con fissaggio snap-in touchproof Spessore pannello 1mm ~ 3mm Contatti Ottone stagnato Faston 6,3 mm Corpo Nylon Codice omologazione Bulgin FX 0430	250 V Snap-in fixing touchproof Panel Thickness 1mm ~ 3mm Contacts Tinned brass Faston 6,3 mm Body Nylon Approval code Bulgin FX 0430	250 V À enclenchement rapide antichoc Epaisseur du panneau 1mm ~ 3mm Contacts Laiton étamé Faston 6,3 mm Corps Nylon Code d'homologation Bulgin FX 0430	
	 			Categoria PC3

P0460	Per fusibili 5x20	For 5x20 fuses	Pour fusibles 5x20	
	250 V Antichock Contatti Ottone argentato Corpo Poliestere UL 94V0 Tappo A vite Codice omologazione Bulgin FX 0460	250 V Touchproof Contacts Silver-plated brass Body Poliestere UL 94V0 Carrier Screw fixing Approval code Bulgin FX 0460	250 V Antichoc Contacts Laiton argenté Corps Polyester UL 94V0 Capuchon À vis Code d'homologation Bulgin FX 0460	
	 			Categoria PC3

P0461	Per fusibili 5x20	For 5x20 fuses	Pour fusibles 5x20	
	250 V Antichock Contatti Ottone argentato Corpo Poliestere UL 94V0 Tappo A vite Codice omologazione Bulgin FX 0461	250 V Touchproof Contacts Silver-plated brass Body Poliestere UL 94V0 Carrier Screw fixing Approval code Bulgin FX 0461	250 V Antichoc Contacts Laiton argenté Corps Polyester UL 94V0 Capuchon À vis Code d'homologation Bulgin FX 0461	
	 			Categoria PC3