


FUSIBILI CILINDRICI

Cylindrical fuses | *Fusibles cylindriques*



FUSIBILI 5x20 CON CODICE COLORE SF

5x20 SF fuses with code colors | *Fusibles 5x20 avec code couleur SF*

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann S500 - OMEGA	Approval code Bussmann S500 - OMEGA	Code d'homologation Bussmann S500 - OMEGA
Norme riferimento EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Standards EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Normes EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661



pag. 32




TEMPI DI FUSIONE | Time current | *Temps de fusion*

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
50 mA - 100 mA	min 60 min	max 30 min	min 10 ms - 500 ms	max 3 ms - 100 ms	max 20 ms
125 mA - 6,3 A	min 60 min	max 30 min	min 50 ms - 2 s	max 10 ms - 300 ms	max 20 ms
8 A - 10 A	min 30 min	max 30 min	min 50 ms - 2 s	max 10 ms - 400 ms	max 40 ms

Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
<i>Courant nominal</i>	<i>Homologations</i>	<i>Code</i>	<i>Code</i>	<i>Chute de tension mV</i>	<i>I²t</i>	<i>Pouvoir de coupure A</i>
50 mA		SF520050	SF521050	2400	0,00020	35
63 mA		SF520063	SF521063	2000	0,00057	35
80 mA		SF520080	SF521080	1200	0,0012	35
100 mA		SF520110	SF521110	1100	0,003	35
125 mA		SF520112	SF521112	1000	0,005	35
160 mA		SF520116	SF521116	2000	0,008	35
200 mA		SF520120	SF521120	1700	0,016	35
250 mA		SF520125	SF521125	1400	0,28	35
315 mA		SF520131	SF521131	1300	0,58	35
400 mA		SF520140	SF521140	1100	0,18	35
500 mA		SF520150	SF521150	220	0,18	35
630 mA		SF520163	SF521163	220	0,35	35
800 mA		SF520180	SF521180	190	0,67	35
1 A		SF520210	SF521210	200	0,60	35
1,25 A		SF520212	SF521212	200	0,84	35
1,6 A		SF520216	SF521216	190	1,6	35
2 A		SF520220	SF521220	150	4,2	35
2,5 A		SF520225	SF521225	150	6,1	35
3,15 A		SF520231	SF521231	130	13,0	35
4 A		SF520240	SF521240	130	22,0	40
5 A		SF520250	SF521250	120	42,0	50
6,3 A		SF520263	SF521263	120	69,0	63
8 A		SF520280	SF521280	120	-	80
10 A		SF520310	SF521310	120	-	100



1000 pz
1000 pcs
1000 pces



FUSIBILI 5x20 SF

5x20 SF fuses | *Fusibles 5x20 SF*

Dimensioni	Dimensions	Dimensions
5x20 mm	5x20 mm	5x20 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Cod. omologazione Bussmann S500 - OMEGA	Approval code Bussmann S500 - OMEGA	Code d'homologation Bussmann S500 - OMEGA
Norme riferimento EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Standards EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661	Normes EN60127.2.1 / VDE 0820 / CEI 32.6.2 BS 4265 / SEMKO 104 / DIN 41661



pag. 32



TEMPI DI FUSIONE | Time current | *Temps de fusion*

Corrente nominale In Rated current <i>Courant nominal</i>	Corrente di prova Test current <i>Courant d'essai</i>				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
50 mA - 100 mA	min 60 min	max 30 min	min 10 ms - 500 ms	max 3 ms - 100 ms	max 20 ms
125 mA - 6,3 A	min 60 min	max 30 min	min 50 ms - 2 s	max 10 ms - 300 ms	max 20 ms
8 A - 10 A	min 30 min	max 30 min	min 50 ms - 2 s	max 10 ms - 400 ms	max 40 ms

Corrente nom.	Omologazioni	Codice	Codice	Caduta tensione mV	I ² t	Cap. rottura A
Rated current	Approvals	Code	Code	Voltage drop mV	I ² t	Breaking capacity
<i>Courant nominal</i>	<i>Homologations</i>	<i>Code</i>	<i>Code</i>	<i>Chute de tension mV</i>	<i>I²t</i>	<i>Pouvoir de coupure A</i>
50 mA		SF522050	SF523050	2400	0,00020	35
63 mA		SF522063	SF523063	2000	0,00057	35
80 mA		SF522080	SF523080	1200	0,0012	35
100 mA		SF522110	SF523110	1100	0,003	35
125 mA		SF522112	SF523112	1000	0,005	35
160 mA		SF522116	SF523116	2000	0,008	35
200 mA		SF522120	SF523120	1700	0,016	35
250 mA		SF522125	SF523125	1400	0,28	35
315 mA		SF522131	SF523131	1300	0,58	35
400 mA		SF522140	SF523140	1100	0,18	35
500 mA		SF522150	SF523150	220	0,18	35
630 mA		SF522163	SF523163	220	0,35	35
800 mA		SF522180	SF523180	190	0,67	35
1 A		SF522210	SF523210	200	0,60	35
1,25 A		SF522212	SF523212	200	0,84	35
1,6 A		SF522216	SF523216	190	1,6	35
2 A		SF522220	SF523220	150	4,2	35
2,5 A		SF522225	SF523225	150	6,1	35
3,15 A		SF522231	SF523231	130	13,0	35
4 A		SF522240	SF523240	130	22,0	40
5 A		SF522250	SF523250	120	42,0	50
6,3 A		SF522263	SF523263	120	69,0	63
8 A		SF522280	SF523280	120	-	80
10 A		SF522310	SF523310	120	-	100





1000 pz
1000 pcs
1000 pces



CARATTERISTICHE DI FUSIONE

Time current characteristics | *caracteristiques de fusion*

FUSIBILI 5x20 SF 5x20 SF fuses | *Fusibles 5x20 SF*

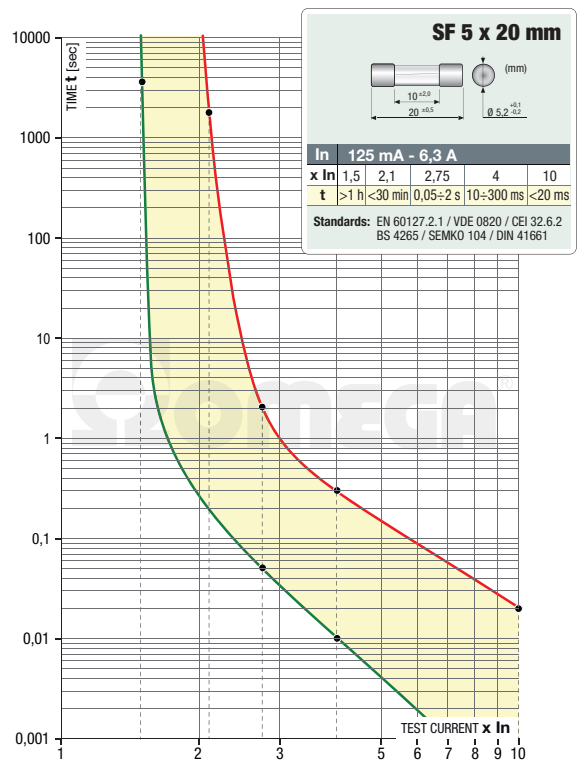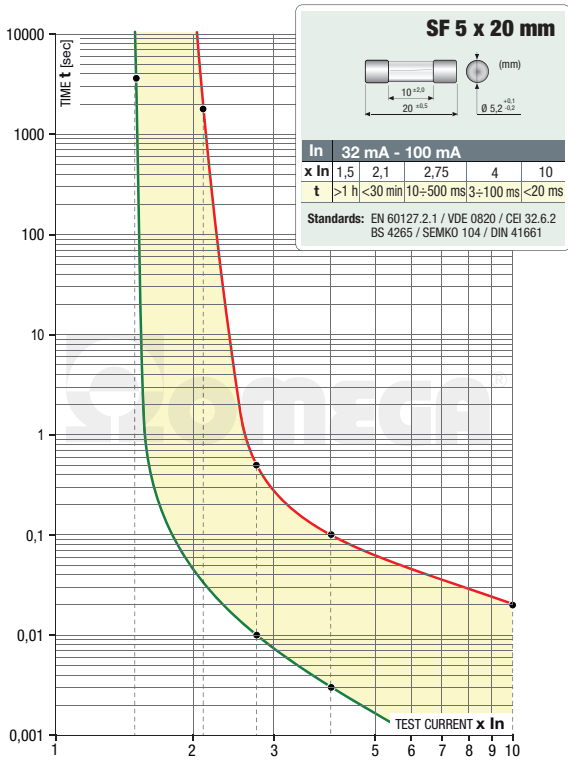

FUSIBILI 5x20 ST 5x20 ST fuses | *Fusibles 5x20 ST*

