



CIRCUIT BREAKERS SM70

SM70 circuit breakers | Coupe-circuit SM70

Corrente
3 A ~ 45 A

Tensione
125 V / 250 V

Capacità di rottura
1000 A - 125 V
200 A - 250 V

Reset
Manuale

Contatti
Faston 6,3 mm

Cicli di lavoro
500

Norme riferimento
IEC 934

Current
3 A ~ 45 A

Voltage
125 V / 250 V

Breaking capacity
1000 A - 125 V
200 A - 250 V

Reset
Manual

Contacts
Faston 6,3 mm

Working cycles
500

Standards
IEC 934

Courant
3 A ~ 45 A

Tension
125 V / 250 V

Pouvoir de coupure
1000 A - 125 V
200 A - 250 V

Reset
Manuel


Contacts
Faston 6,3 mm

Durée de vie
500 cycles

Normes
IEC 934



Corrente nominale Rated current <i>Courant nominal</i>	Codice Code <i>Code</i>	Resistenza Ω Resistance Ω <i>Résistance Ω</i>
3 A	SM7030	0,05
4 A	SM7040	0,05
5 A	SM7050	0,04
6 A	SM7060	0,04
7 A	SM7070	0,025
8 A	SM7080	0,025
9 A	SM7090	0,02
10 A	SM7100	0,02
12 A	SM7120	0,01
15 A	SM7150	0,008
16 A	SM7160	0,008
20 A	SM7200	0,007
30 A	SM7300	0,004
35 A	SM7350	0,004
40 A	SM7400	0,003
45 A	SM7450	0,0025

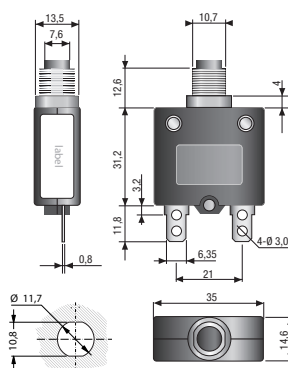

a richiesta è fornibile il cappuccio di protezione PG7000
protection cover type PG7000 available upon request
il est possible de fournir le capot de protection PG7000 sur demande



100 pz
100 pcs
100 pces



pronta
in stock
en stock