




CIRCUIT BREAKERS SM80

SM80 circuit breakers | Coupe-circuit SM80

Corrente 3 A ~ 20 A Tensione 125 V / 250 V Capacità di rottura 1000 A - 125 V Reset Manuale Contatti Faston 6,3 mm Cicli di lavoro 500 Norme riferimento IEC 934	Current 3 A ~ 20 A Voltage 125 V / 250 V Breaking capacity 1000 A - 125 V Working cycles Manual Contacts Faston 6,3 mm Working cycles 500 Standards IEC 934	Courant 3 A ~ 20 A Tension 125 V / 250 V Pouvoir de coupure 1000 A - 125 V Reset Manuel Contacts Faston 6,3 mm Durée de vie 500 cycles Normes IEC 934
--	---	---



Corrente nominale Rated current <i>Courant nominal</i>	Codice Code <i>Code</i>	Resistenza Ω Resistance Ω <i>Résistance Ω</i>
3 A	SM8030	0,120
5 A	SM8050	0,120
6 A	SM8060	0,100
7 A	SM8070	0,100
8 A	SM8080	0,065
9 A	SM8090	0,065
10 A	SM8100	0,065
12 A	SM8120	0,012
14 A	SM8140	0,008
15 A	SM8150	0,008
16 A	SM8160	0,008
20 A	SM8200	0,006

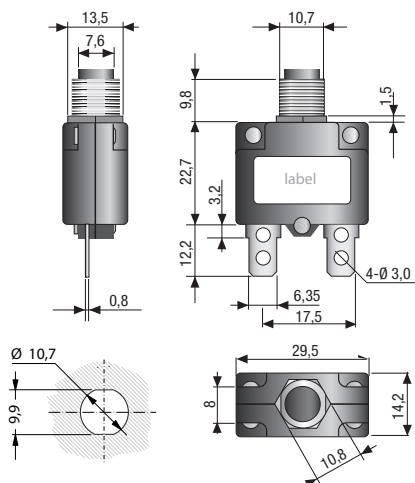

a richiesta è fornibile il cappuccio di protezione PG7009
 protection cover type PG7009 available upon request
 il est possible de fournir le capot de protection PG7009 sur demande



100 pz
100 pcs
100 pces



pronta
in stock
en stock