26/11/2014 Subject to modification in technic and design. Errors and omissions excepted.

Totalizers mechanic

Stroke, meter and revolution counters Display 7-digits, reset by key

H 400, M 400, U 400, U 401



H 400 - Stroke counter

Features

- Stroke, meter and revolution counters
- Adding
- Display 7-digits
- Reset by key



M 400 - Meter counter



U 400 - Revolution counter

Technical data - mechanical design				
7-digits				
7 mm				
Key reset by detachable key either at left or right shaft.				
0+60 °C				
Surface mount housing with mounting plate				
Grey				
106 x 64 x 45 mm				
e 120 x 64 mm				
Base plate, 4 long mounting holes				
350 g				
Housing: Hostaform POM, grey Base blate: steel zinc-coated				

26/11/2014 Subject to modification in technic and design. Errors and omissions excepted.

Totalizers mechanic

Stroke, meter and revolution counters
Display 7-digits, reset by key

H 400, M 400, U 400, U 401

Technical data - mech	anical design
H 400	
Function	Stroke counter
Display	White numbers on black
Count mode	Adding in a stroke direction to be indicated. 1 stroke = 1 count
Drive shaft	Both sides, ø7 mm
Stroke	>38° to <60°
Stroke lever	To be positioned on shaft at will. Stroke lever relocates automatically to start position.
Stroke frequency	≤500 strokes/min
Measuring range	9 999 999
M 400	
Function	Meter counter
Display	White numbers on black Decimal digits in red
Count mode	Adding in a rotational direction to be indicated, subtracting in reverse direction. 2 revs. = 10 counts
Drive shaft	Both sides, ø7 mm
Measuring speed	<100 m/min (measuring wheel)
Measuring accuracy	1 dm
Measuring range	999 999.9 m
U 400	
Function	Revolution counter
Display	White numbers on black
Count mode	Adding in a rotational direction to be indicated, subtracting in reverse direction or always adding. 1 rev. = 1 count
Drive shaft	Both sides, ø7 mm
Operating speed	≤1000 rpm
Measuring range	9 999 999
U 401	
Function	Revolution counter
Display	White numbers on black
Count mode	Adding in a rotational direction to be indicated, subtracting in reverse direction. 1 rev. = 1 count
Drive shaft	Centered below, ø7 mm
Operating speed	≤1000 rpm

9 999 999

Direction of strokes and rotation

H 400, M 400, U 400





Away from user Sense of rotation or stroke direction I Towards user Sense of rotation or stroke direction II

U 401





Sense of rotation I

Sense of rotation II

Accessories

	Measuring	wheels	for	М	400
--	-----------	--------	-----	---	-----

modeum g t	
MR512.07A	Circumf. 50 cm, knurled aluminium
MR542.07D	Circumf. 50 cm, smooth Hytrel TPE-E
MR552.07A	Circumf. 50 cm, smooth Vulkollan PUR
MR562.07A	Circumf. 50 cm, knopped rubber NBR Nitril
MR592.07D	Circumf. 50 cm, grooved Hytrel TPE-E


Measuring range

26/11/2014 Subject to modification in technic and design. Errors and omissions excepted.

Totalizers mechanic

Stroke, meter and revolution counters Display 7-digits, reset by key

H 400, M 400, U 400, U 401

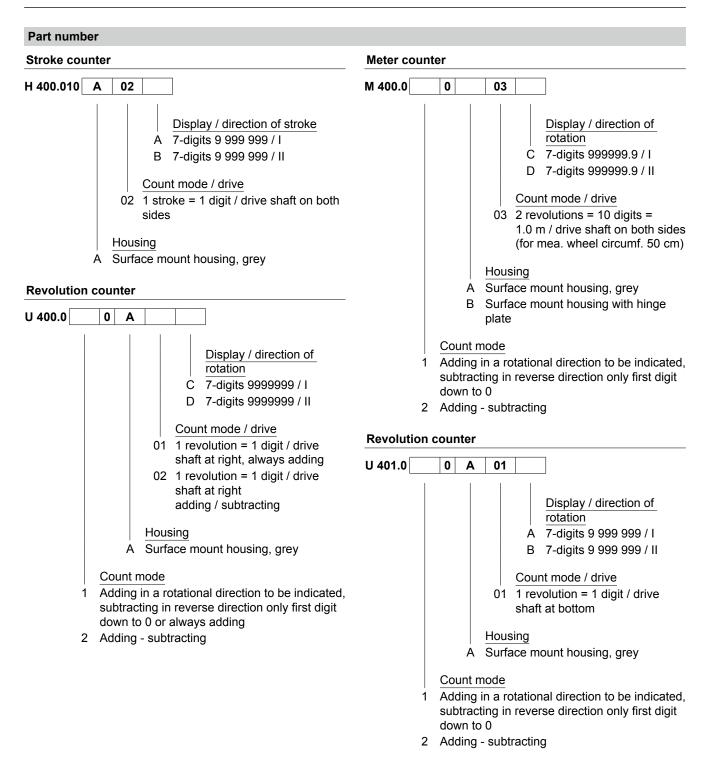


Totalizers mechanic

Stroke, meter and revolution counters
Display 7-digits, reset by key

H 400, M 400, U 400, U 401

Dimensions

H 400, M 400, U 400

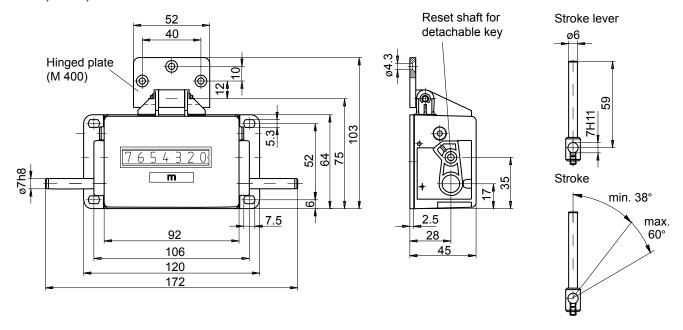

U 401

