

PLS-080A-6VAL



PLS-080A-6VAL

Stainless Steel Power Level
Sensor

Electrical Characteristics @ 25 °C

Contact form		A
Contact rating max.	W / VA	50
Switching voltage max.	VDC	200
	VAC	250
Switching current max.	A	1.5
Carry current max.	A	2
Breakdown voltage min.	VDC	400
Total resistance max.	mΩ	150

Environmental Characteristics

Operating temperature	°C	-40 to +125
Storage temperature	°C	-40 to +125

Features


- Stainless Steel housing
- Rugged and durable
- Mains voltage variant
- Suitable for food contact
- Extended temperature range

Mechanical Characteristics

Density of float typ.*	g / cm ³	0.7
Recommended minimum gravity of medium	g / cm ³	Density of float + 20%

* in delivery condition

Dimensions in mm

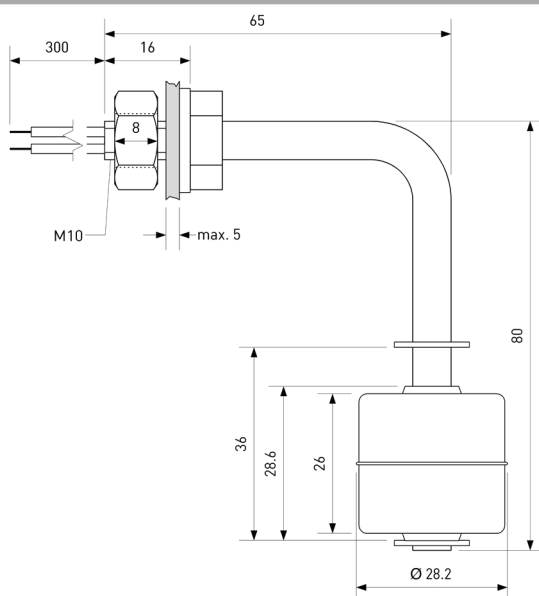

Approvals

RoHS

REACH

IP 67



Ordering Information

Packing Unit	5	pcs
Weight per piece	54	g
Weight per package	278	g

PLS-080A-6VAL

PLS-080A-6VAL


Stainless Steel Power Level
Sensor



Material Information

	Material	Colour
Housing	Stainless Steel 304, mechanically polished	
Cable	UL 1332, AWG 22, 4 mm stripped and tinned	black
Nuts	Stainless Steel 304, M10, 1 pc preassembled	
Float	Stainless Steel 304, mechanically polished	
Potting	PU / Epoxy	black
Sealing ring	Silicone	white

Operation View




Remarks

When mounted near ferromagnetic parts
switching distance of PLS-080A-6VAL
may vary.

Electromagnetical influences and
magnetic fields may change
the switching behaviour of the
Level Sensor.

Mounting

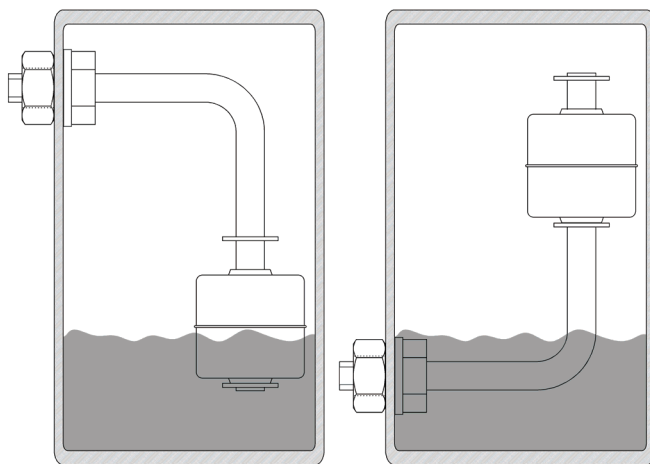

When mounted stem up,
operating functions are reversed.