Surface-mounted luminaire

SLIM LED - LIQ 6 112544000-00001328



fitted with

work equipment connected load power consumption system of protection class of protection usage luminaire body lamp cover weight (net) mains lead fastening dimension special features




ENGINEER OF LIGHT.

6 x Light-emitting diode light colour daylight white without 22-29 V; DC approx. 3.5 W IP 67 III external aluminium/plastic, anodised, aluminium coloured anodised acrylic clear approx. 0.2 kg approx. 3.0 m; with free stranded wires screws A=196mm,C=150mm direction of beam +/- 45° adjustable



illuminance

Comment: d=50cm

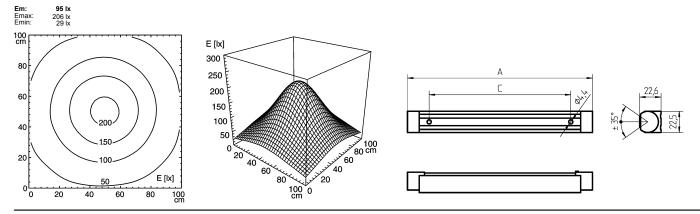

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.