## Surface-mounted luminaire

SLIM LED - LIQ 6 112544010-00011101



## fitted with

work equipment connected load power consumption system of protection class of protection usage luminaire body lamp cover weight (net) mains lead fastening dimension special features




ENGINEER OF LIGHT.

6 x Light-emitting diode light colour daylight white without 22-29 V; DC approx. 3.5 W IP 67 III external aluminium/plastic, anodised, aluminium coloured anodised potting, clear approx. 0.2 kg approx. 3.0 m; with free stranded wires screws A=196mm, C=150mm direction of beam +/- 45° adjustable



## illuminance



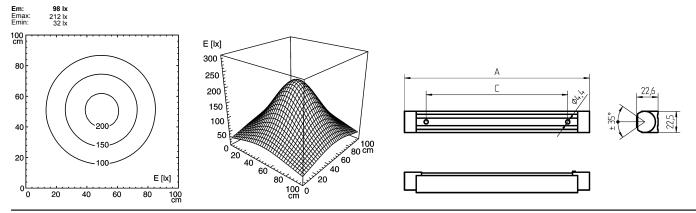

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.