## Surface-mounted luminaire

SLIM LED - LIQ 24 112545007-00011131



fitted with

work equipment connected load power consumption system of protection class of protection usage luminaire body lamp cover weight (net) mains lead fastening dimension




ENGINEER OF LIGHT.

24 x Light-emitting diode light colour daylight white without 22-29 V; DC approx. 14 W IP 67 III external aluminium/plastic, anodised, aluminium coloured anodised Acrylic satine approx. 0.4 kg approx. 3.0 m; with free stranded wires screws A=616mm, C=600mm



## illuminance

Comment: d=50cm

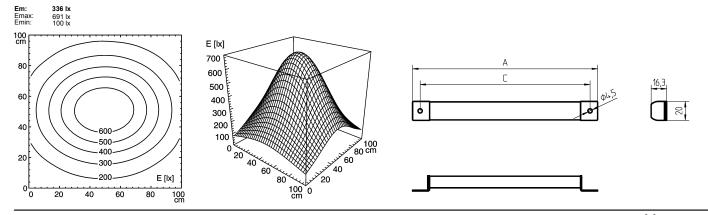

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.