



fitted with

work equipment
connected load
power consumption
luminous flux
luminous efficacy
light distribution
system of protection
class of protection
technology
usage
luminaire body
lamp cover
weight (net)
mains lead
design
fastening
special features


1 x Light-emitting diode
light colour neutral white
without
24 V; DC
approx. 6 W
approx. 410 lm
approx. 68 lm/W
direct
IP 67
III
switchable
external
aluminium, anodised,
screen, clear
approx. 0.4 kg
approx. 3.0 m; with free stranded wires
integrated version
screws
beam angle 30°, integrated version



illuminance

Comment: d=50cm

Em: 333 lx
Emax: 1224 lx
Emin: 26 lx

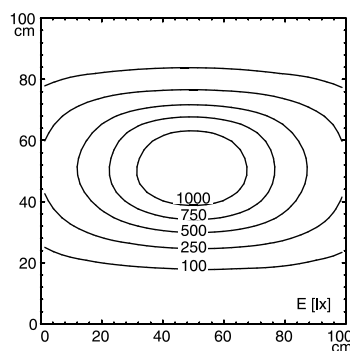

luminous intensity

