Surface-mounted luminaire

MACH LED PRO - MUAL 4 S 112571036-00082846



fitted with


work equipment connected load power consumption luminous flux luminous efficacy light distribution system of protection class of protection technology usage luminaire body lamp cover weight (net) mains lead design fastening special features



ENGINEER OF LIGHT.

4 x Light-emitting diode light colour neutral white without 24 V; DC approx. 24 W approx. 1600 lm approx. 67 lm/W direct IP 67 Ш switchable external aluminium, anodised, screen, clear approx. 1.2 kg approx. 3.0 m; with free stranded wires mounted version screws mounted version



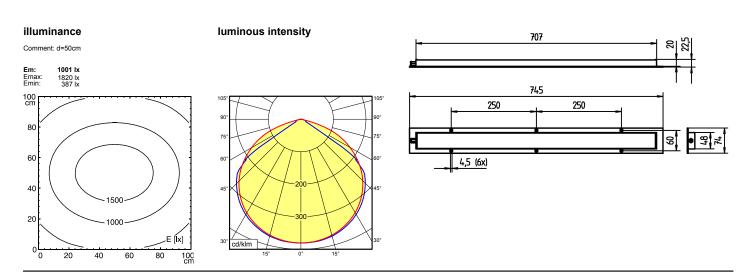

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.