


Category (ETIM):	Device mounts
Type:	Device mounts IP20 SDGOB LED
Order number:	18510106600
Configuration:	LED, Colour rendering/Light colour CRI $\geq 80$ / 4000K
LED service life:	50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	26
Luminaire luminous flux (lm):	4000
Luminaire luminous efficacy (lm/W):	157
Energy efficiency class:	A++
Ambient temperatures:	10°C / 45°C
Certifications:	IP 20, protection class I, BAP 65°<3000, ENEC10 VDE, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.9
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863325269
Commodity code:	94051098

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Direct wide-beam light distribution using individual lens. optic made of PMMA plastic. Continuous optics. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37  
 Configuration: LED, Colour rendering/Light colour CRI  $\geq 80$  / 4000K  
 LED service life: 50000h L80/B10  
 Luminaire luminous flux (lm): 4000  
 Luminaire luminous efficacy (lm/W): 157  
 Operating device: Electronic driver DALI (1 pcs.)  
 System performance (W): 26  
 Energy efficiency class: A++  
 Conditions: Suitable for use in ambient temperatures of 10°C to 45°C  
 Certifications: IP 20, protection class I, BAP 65°<3000, ENEC10 VDE, F, DIN10500/Food, Indoor, CE


Regiolux GmbH  
 Type: SDGOB LED 4000 840 DALI vw  
 Article number: 18510106600  
 Product deep link:  
<http://www.regiolux.de/de/article/18510106600>  
 5 year guarantee after registration on website.

SDGOB LED 4000lm 840 - vw - DALI - 18510106600

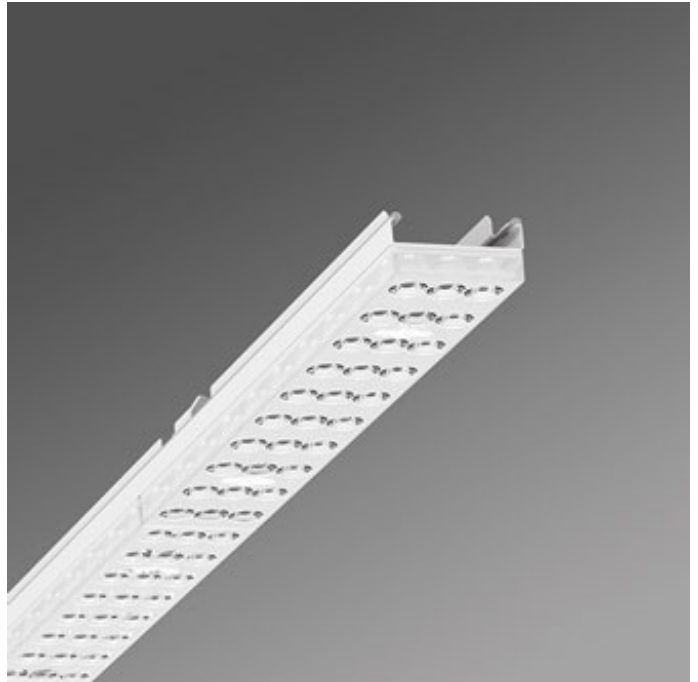

### Lighting technology

Individual.Lens.Optic-direct wide distribution  
 SDGOB LED 4000 lm 840



$\eta_{LB}$	100 %
lm/W	157
$\phi \downarrow / \uparrow$	98 % / 2 %
UGRq/l	19.1 / 19.5
BAP	65° < 3000cd/m <sup>2</sup>

