REGIOLUX

SDGOH LED 8000lm 840 - vw - DALI - 18540306600
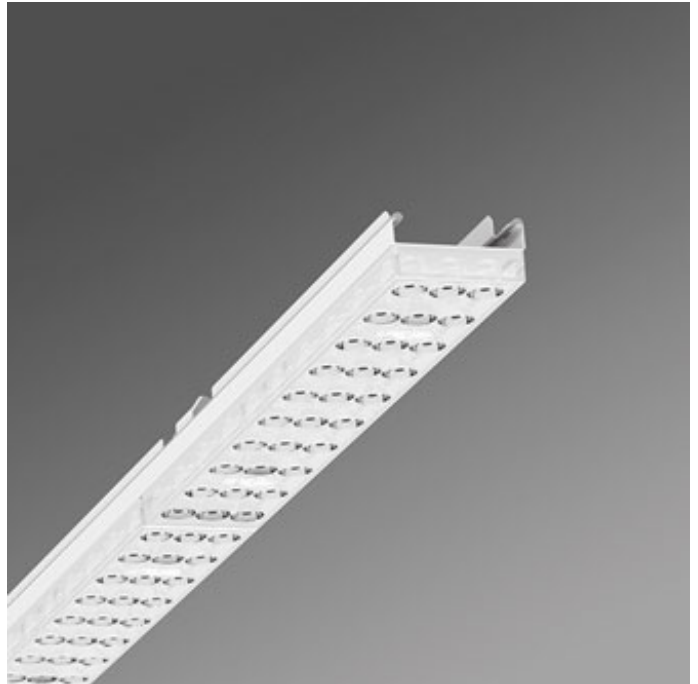
Category (ETIM):	Device mounts
Type:	Device mounts IP20 SDGOH LED
Order number:	18540306600
Configuration:	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
LED service life:	50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	56
Luminaire luminous flux (lm):	8000
Luminaire luminous efficacy (lm/W):	138
Energy efficiency class:	A++
Ambient temperatures:	10°C / 35°C
Certifications:	IP 20, protection class I, BAP 65°<3000, ENEC10 VDE, F, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.9
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863325719
Commodity code:	94051098

Quick-fit mounting system Device mounts; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Housing colour traffic white RAL 9016; Extremely direct narrow-beam light distribution with controlled rack lighting using individual. lens. optic made of PMMA plastic. Continuous optics. Uniform LED spacing, even across circuit boards. 3-row LED arrangement. Light direction components are easy to maintain due to smooth surface which is easily cleaned. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
LED service life: 50000h L80/B10
Luminaire luminous flux (lm): 8000
Luminaire luminous efficacy (lm/W): 138
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 56
Energy efficiency class: A++
Conditions: Suitable for use in ambient temperatures of 10°C to 35°C
Certifications: IP 20, protection class I, BAP 65°<3000, ENEC10 VDE, F, DIN10500/Food, Indoor, CE

Regiolux GmbH
Type: SDGOH LED 8000 840 DALI vw
Article number: 18540306600
Product deep link:
http://www.regiolux.de/de/article/18540306600
5 year guarantee after registration on website.

Lighting technology

Individual.Lens.Optic-direct extremely narrow distribution
SDGOH LED 8000 lm 840

η_{LB}	100 %
lm/W	138
$\varphi \downarrow / \uparrow$	99 % / 1 %
UGRq/l	12.6 / 11.3
BAP	65° < 3000cd/m²

◄ 55 ►
37

⊕ Accessories