

Category (ETIM):	Device mount IP 54
Type:	Device mounts IP54 SDGSOT LED
Order number:	18620206600
Configuration:	LED, Colour rendering/Light colour CRI \geq 80 / 4000K
LED service life:	50000h L80/B10
Operating device:	Electronic driver DALI (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	39
Luminaire luminous flux (lm):	6000
Luminaire luminous efficacy (lm/W):	148
Energy efficiency class:	A++
Ambient temperatures:	-20°C / 40°C
Certifications:	IP 54, protection class I, ENEC10 VDE, F, D, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.9
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863325924
Commodity code:	94051098


Quick-fit mounting system Device mount IP 54; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Lighttechnical element with transparent seal, end faces made of plastic, all-round closed seal to mounting rail. Housing colour traffic white RAL 9016; Direct, open light distribution, individual. lens. optic made of polycarbonate. Heat-resistant cables including fixed 5-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
Configuration: LED, Colour rendering/Light colour CRI \geq 80 / 4000K

LED service life: 50000h L80/B10
Luminaire luminous flux (lm): 6000
Luminaire luminous efficacy (lm/W): 148
Operating device: Electronic driver DALI (1 pcs.)
System performance (W): 39
Energy efficiency class: A++
Conditions: Suitable for use in ambient temperatures of -20°C to 40°C
Certifications: IP 54, protection class I, ENEC10 VDE, F, D, DIN10500/Food, Indoor, CE


Regiolux GmbH
Type: SDGSOT LED 6000 840 DALI vw
Article number: 18620206600
Product deep link:
<http://www.regiolux.de/de/article/18620206600>
5 year guarantee after registration on website.

SDGSOT LED 6000lm 840 - vw - DALI - 18620206600

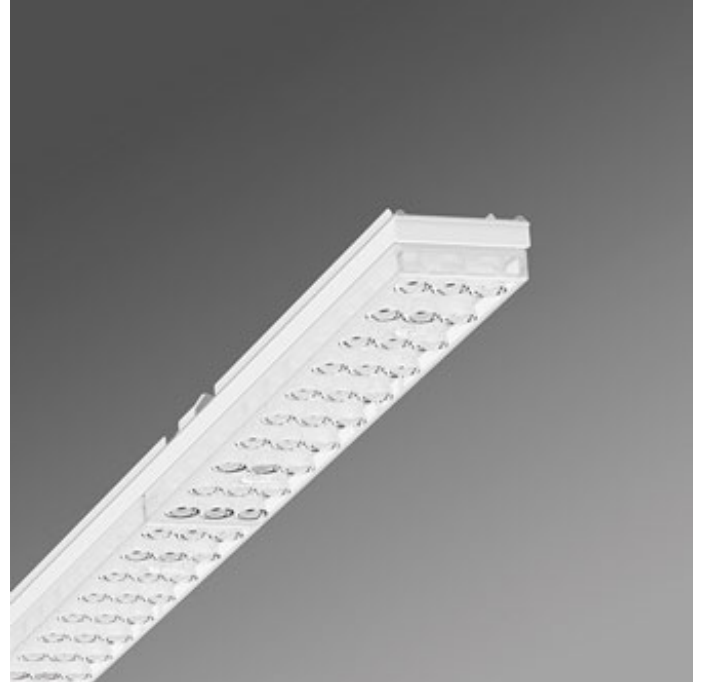

Lighting technology

Individual.Lens.Optic-direct narrow distribution
SDGSOT LED 6000 lm 840



η_{LB} 100 %
lm/W 148
 $\phi \downarrow / \uparrow$ 99 % / 1 %
UGRq/l 18.5 / 20.4

