


Category (ETIM):	Device mount IP 54
Type:	Device mounts IP54 SDGSOTB LED
Order number:	18630204100
Configuration:	LED, Colour rendering/Light colour CRI \geq 80 / 4000K
LED service life:	50000h L80/B10
Operating device:	Electronic driver (1 pcs.)
Mains voltage:	230V / 50Hz
System performance (W):	39
Luminaire luminous flux (lm):	6000
Luminaire luminous efficacy (lm/W):	148
Energy efficiency class:	A++
Ambient temperatures:	-20°C / 40°C
Certifications:	IP 54, protection class I, BAP 65°<3000, ENEC10 VDE, F, D, DIN10500/Food, Indoor, CE
Colour of the housing:	traffic white RAL 9016
Weight (net) (kg):	1.9
Dimensions LxWxH/DxH (mm):	1531 x 55 x 37
mounting method:	Mounting rail system mounting
EAN-number:	4020863325979
Commodity code:	94051098

Quick-fit mounting system Device mount IP 54; Device mount made of galvanised, profiled sheet steel, surface coated with polyester resin enamel. Toolless fastening with two integrated pressure locks. Lighttechnical element with transparent seal, end faces made of plastic, all-round closed seal to mounting rail. Housing colour traffic white RAL 9016; Direct, open light distribution, individual. lens. optic made of polycarbonate. Heat-resistant cables including fixed 3-pole rapid installation plug connector with tool-less phase pre-selection and locating finger.

Dimensions LxWxH/DxH (mm): 1531 x 55 x 37
 Configuration: LED, Colour rendering/Light colour CRI \geq 80 / 4000K
 LED service life: 50000h L80/B10
 Luminaire luminous flux (lm): 6000
 Luminaire luminous efficacy (lm/W): 148
 Operating device: Electronic driver (1 pcs.)
 System performance (W): 39
 Energy efficiency class: A++
 Conditions: Suitable for use in ambient temperatures of -20°C to 40°C
 Certifications: IP 54, protection class I, BAP 65°<3000, ENEC10 VDE, F, D, DIN10500/Food, Indoor, CE


Regiolux GmbH
 Type: SDGSOTB LED 6000 840 ET vw
 Article number: 18630204100
 Product deep link:
<http://www.regiolux.de/de/article/18630204100>
 5 year guarantee after registration on website.

SDGSOTB LED 6000lm 840 - vw - ET - 18630204100

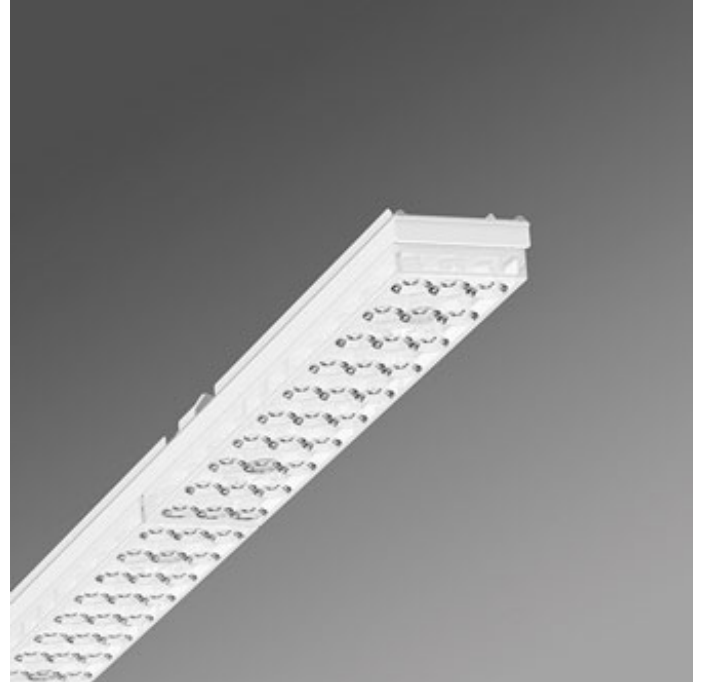

Lighting technology

Individual.Lens.Optic-direct narrow/wide distribution
 SDGSOTB LED 6000 lm 840



η_{LB}	100 %
lm/W	148
$\phi \downarrow / \uparrow$	98 % / 2 %
UGRq/l	17.8 / 18.1
BAP	65° < 3000cd/m ²

