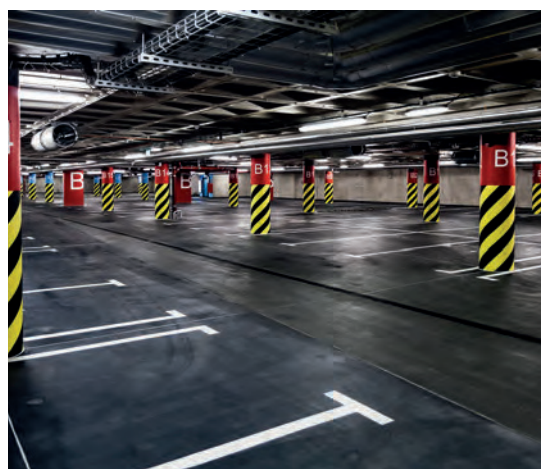

Colors:

90

Weatherproof LED luminaire, comprising:

- Polycarbonate housing
- UV stabilised transparent polycarbonate diffuser
- Reflector made of white (UV-resistant) painted steel sheet used also as electrical component tray
- Polyurethane foam gasket
- Electrical connection with outdoor-rated plug-socket quick connector (IP66) that allows connection to mains without opening the luminaire. Made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
- Parallel-compensated luminaires
- Light beam obtained by the combination of multiple LED modules
- Clip in technopolymer reinforced with fibreglass
- Stainless steel springs for quick ceiling mount
- IKE/LED EM versions come with a built-in, 3-hour emergency battery pack. Suitable for both general as well as emergency lighting
- Self-extinguishing V2-UL94 housing and diffuser, glow wire 850 °C
- 3000 K and 5700 K available upon request
- The IKE/LED FC versions are complete with through-wiring for continuous line installation



IKE LED
n.36 LED




IKE LED
n.108 LED



IKE LED
n.144 LED

330 mm / 36 LED
800 mm / 108 LED
860 mm / 144 LED



675 mm / 36 LED
1285 mm / 108 LED
1585 mm / 144 LED

145

Lamps

	LED	n. 36 LED - 15 W
	LED	n. 108 LED - 42 W
	LED	n. 144 LED - 56 W

IKE/LED S/EW

IK09 12J xx7

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 36 LED	15 W	-	-	90	I		4000	•	-	S/EW	-	1914 lm	1466 lm	60000 h	L80	-	06162290		
n. 108 LED	42 W	-	-	90	I		4000	•	-	S/EW	-	5742 lm	4401 lm	60000 h	L80	-	06161090		
n. 144 LED	56 W	-	-	90	I		4000	•	-	S/EW	-	7656 lm	5874 lm	60000 h	L80	-	06159890		

Power LED dimmable 1-10 V 220/240 V 50/60 Hz

n. 36 LED	15 W	-	-	90	I		4000	•	-	S/EW	-	1914 lm	1466 lm	60000 h	L80	-	06162590		
n. 108 LED	42 W	-	-	90	I		4000	•	-	S/EW	-	5742 lm	4401 lm	60000 h	L80	-	06161690		
n. 144 LED	56 W	-	-	90	I		4000	•	-	S/EW	-	7656 lm	5874 lm	60000 h	L80	-	06160490		

Power LED - dimmable DALI 220/240V 50/60Hz

n. 36 LED	15 W	-	-	90	I		4000	•	-	S/EW	-	1914 lm	1466 lm	60000 h	L80	-	06162890		
n. 108 LED	42 W	-	-	90	I		4000	•	-	S/EW	-	5742 lm	4401 lm	60000 h	L80	-	06161990		
n. 144 LED	56 W	-	-	90	I		4000	•	-	S/EW	-	7656 lm	5874 lm	60000 h	L80	-	06160790		

IKE/LED FC S/EW

IK09 12J xx7

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED 220/240 V 50/60 Hz																			
n. 36 LED	15 W	-	-	90	I		4000	•	-	S/EW	-	1914 lm	1466 lm	60000 h	L80	-	06165390		
n. 108 LED	42 W	-	-	90	I		4000	•	-	S/EW	-	5742 lm	4401 lm	60000 h	L80	-	06165090		
n. 144 LED	56 W	-	-	90	I		4000	•	-	S/EW	-	7656 lm	5874 lm	60000 h	L80	-	06164790		

IKE/LED EM S/EW

IK09 12J xx7

LED NUMBER	WATTAGE	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ $\geq 0,9$	EEL	OPTIC	OPTIC BEAM	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	LIFETIME	L	°C	PART NUMBER	REMARKS	EURO
Power LED - Emergency 3P 220/240 V 50/60 Hz																			
n. 108 LED	42 W	-	-	90	I		4000	•	-	S/EW	-	5742 lm	4401 lm	60000 h	L80	-	06161390		
n. 144 LED	56 W	-	-	90	I		4000	•	-	S/EW	-	7656 lm	5874 lm	60000 h	L80	-	06160190		

OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER	EURO
IKE n. 108 LED - 1285 mm			
A0116 Galvanized steel protection grills, to be fixed on ceiling.	95	14430995	
IKE n. 144 LED - 1585 mm			
A0116 Galvanized steel protection grills, to be fixed on ceiling	95	14431995	



A0116

