


5 pin

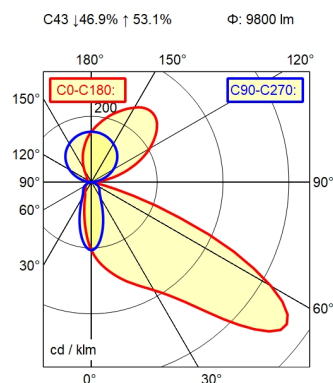

#### Work equipment

#### Connected load

#### Power consumption

#### Luminous flux

#### Luminous efficiency <sup>1)</sup>

#### Light type/-color

#### Colour temperatur

#### Color rendering index

#### Light distribution

#### Chromaticity tolerance LED

#### Glare control

#### System of protection/Class

#### Technology

#### Housing

#### Light source cover

#### Mains lead

#### Design

#### Fastening

#### Maximum ambient temperature

#### Life expectancy LED

#### EAN

#### Weight without/incl. packaging

#### Packaging dimensions

#### Special features

#### Power supply unit

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 116 W

approx. 10.700 lm

approx. 92 lm/W

Warm white

approx. 3.000 K

CRI ≥ 80

Direct/indirect

< 3 SDCM

Diffusor

IP 20; I

Switchable

Sectional aluminium; Anodised; Aluminium  
coloured anodised  
Acrylic (PMMA); White opal

Connector; 5 pin

mounted version

Wall bracket

25 °C

L80B50 50.000h

4013330146184

ca. 6,9 kg; 8,9 kg

ca. 133 mm; 400 mm; 1.185 mm

General light, indirect, 3000K, Ra≥80; Reading light,  
direct, 2700K, Ra≥90; Examination light, direct,  
direkt, 4000K, 60W, Ra≥95, R9≥50; DIN EN  
60598-2-25

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g