


## ABSENT ESSENTIAL DPL

It represents a high-quality, essential and efficient back-lighting solution

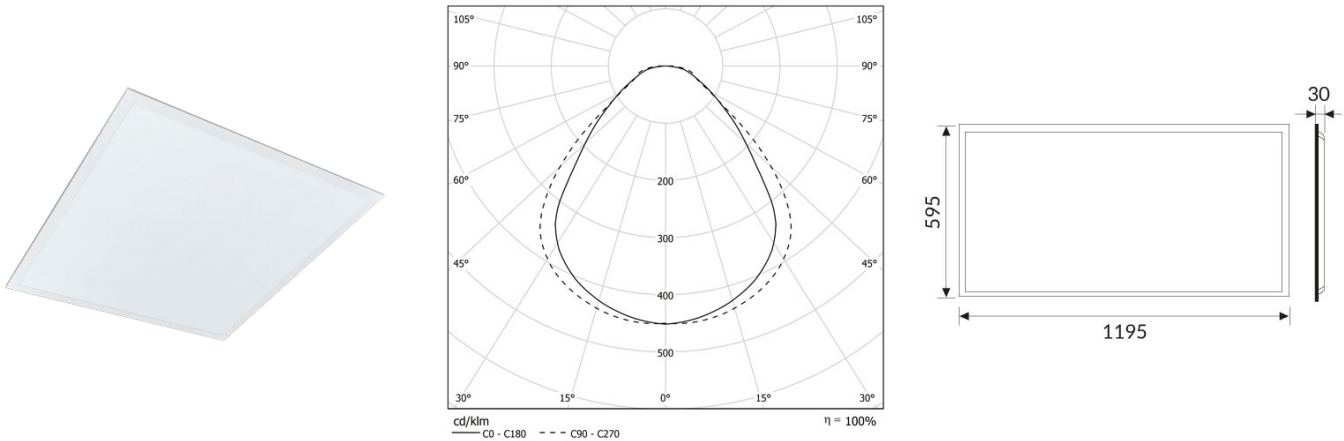

CODE		FLUX	SIZE	CERTIFICATIONS
41DPL60K4EM6	60W 4000K	7150lm	1195x595mm	   

### Optics

Diffuser in Diamond Prism LED (DPL) Technology with  $\text{UGR} < 19$  for ambient with display screen equipment.

### Specifications

$\text{CRI} > 94$ ;  
 $\text{R9}$ : 69;  
 McAdams 3;  
 Life Time:  $\text{L80/B10} > 50.000\text{h}$ ;  
 5 years complete warranty;  
 Eye safety: RG0 in accordance with EN62471:2009

### Body

Steel plate body with epoxy powder coating.

### Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor  $> 0.97$