

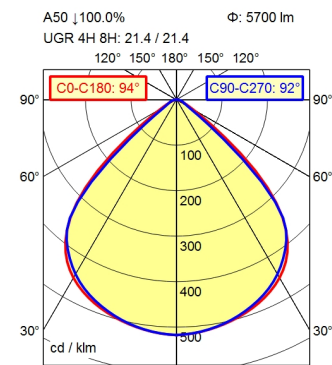


M12-A-5

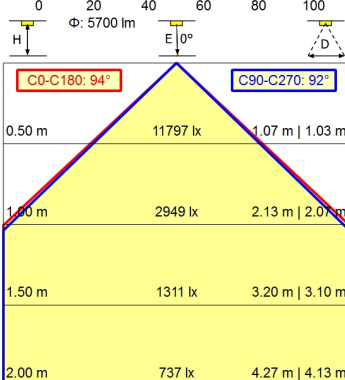

100 x 100 cm Φ : 5700 lm
Em: 2134 lx
Emax: 2732 lx
Emin: 1468 lx



light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light distribution
beam angle
colour temperature
colour temperatur
color rendering index (CRI)
chromaticity tolerance LED
glare control
luminance (L65)
unified glare rating (4H 8H)
system of protection
class of protection
technology
operation
housing
cover
weight (net)
mains lead
fastening
dimension
special features

LED
without
24 V, DC
env. 42 W
approx. 5.700 lm
approx. 136 lm/W
direct
92°
neutral white
approx. 5.000 K
 ≥ 80
 < 3 SDCM
screen
 ≤ 4200 cd/m²
 ≤ 22
IP 67
III
multi-stage switchable
external
aluminium; anodised; aluminium coloured
anodised
glass screen
env. 3,53 kg
built-in plug; M12-A-5
snap-fit
A=573 mm
ADVANCED package

Recessed luminaire ACURIA.perfect
APE 6000/850/MS
114324000-00806657
