






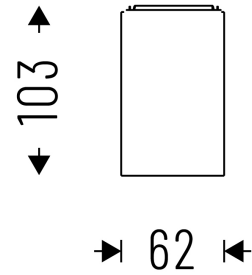

## ARKEON 2.0 CLD Low Power

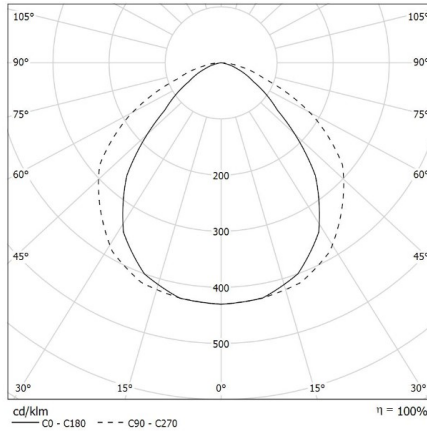

CODE		FLUX	SIZE	CERTIFICATIONS
46DR42CLDK3D	42W 3000K	3990lm	1968mm	   

### Optic

Direct emission with CLD technology diffuser (collimated diffuser UGR<16).

### Body

Aluminum with epoxy powder coating.

### Technical features

- Built-in driver
- CRI>90
- Eye safety: RG0/RG1
- Mac Adams 3
- L90/B10 >50.000h
- 5 years warranty

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Colors

- White RAL 9003 - code B
- Black RAL 9005 - code C8
- + other colors-on request

### Wiring

D: Standard wiring is 220–240V / 50–60Hz, DALI dimmable (The DALI version complies with CAM Edilizia – Ministerial Decree 24 November 2025, No. 256, Official Gazette No. 281/2025).