







## ARKEON HCL

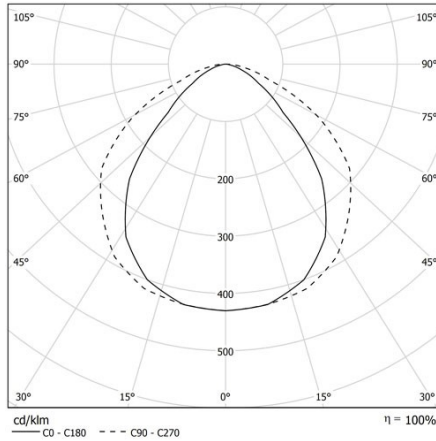

CODE		FLUX	SIZE	CERTIFICATIONS
46DR72CLDHCL	72W	7420lm	1688mm	  

### Specifications

Integrated driver;  
CRI>90;  
Mac Adams 3;  
Colour temperature range from 2700K to 6500K;  
DALI DT8 Driver;  
Controllable with N/A button or DIMKITHCL management system;  
Life Time: L80/B50 >50.000h;  
5 years complete warranty;  
Eye safety: risk-free (RG 0) in accordance with EN62471:2009

### Optic

Direct emission with CLD technology diffuser (collimated diffuser UGR<16).

### Body

Aluminum extruded body with epoxy powder coating.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.