

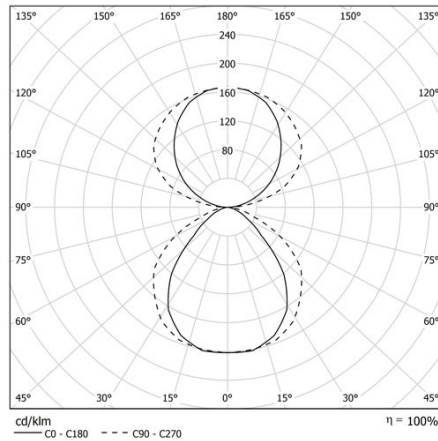


# ARKEON HIGH EFFICIENCY CLD DOUBLE EMISSION

Direct / indirect emission with CLD technology diffuser. Continuous indirect emission. UGR<16

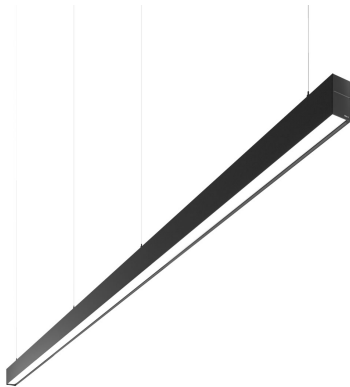

CODE		FLUX	SIZE	CERTIFICATIONS
46DI106CLDK4	106W 4000K	13281lm	3088mm	  

## Optic

Direct / indirect emission with CLD technology diffuser (collimated diffuser UGR<16). Continuous indirect emission.

## Specifications

Built-in Driver;  
CRI>90;  
Mac Adams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

## Body

Aluminum extruded body with epoxy powder coating.

## Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

## Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97