





ARKEON HIGH EFFICIENCY CLD DOUBLE EMISSION

Direct / indirect emission with CLD technology diffuser. Continuous indirect emission. UGR<16

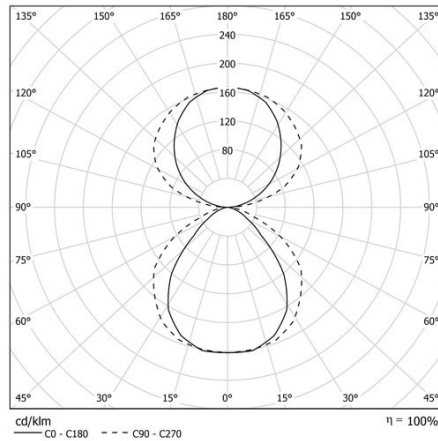

CODE		FLUX	SIZE	CERTIFICATIONS
46DI38CLDL490	38W 4000K	4761lm	1128mm	  

Optic

Direct / indirect emission with CLD technology diffuser (collimated diffuser UGR<16). Continuous indirect emission.

Specifications

Built-in Driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Aluminum extruded body with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.