



ARKEON HIGH EFFICIENCY CLD DOUBLE EMISSION

Direct / indirect emission with CLD technology diffuser. Continuous indirect emission. UGR<16

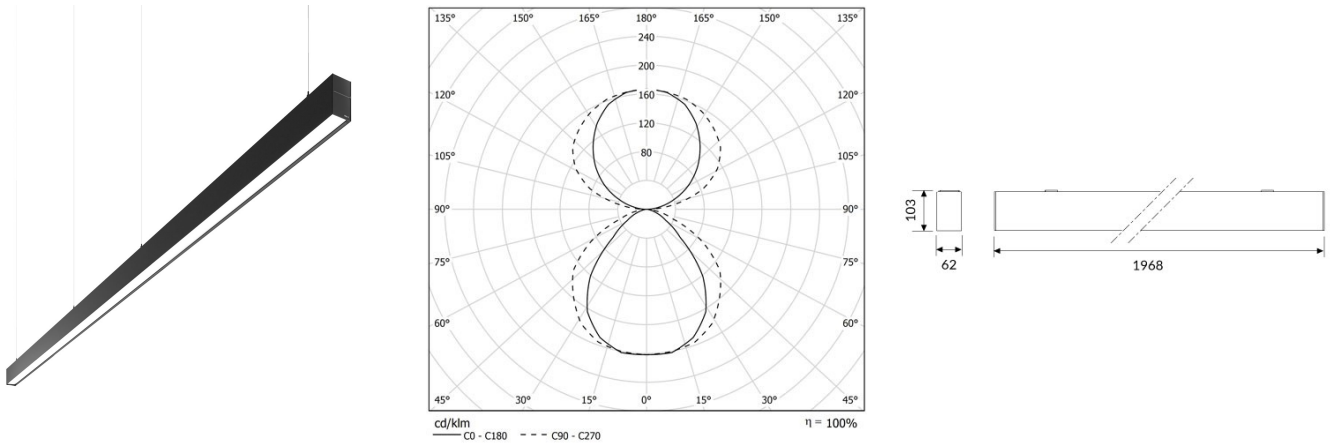

CODE		FLUX	SIZE	CERTIFICATIONS
46DI68CLDL490	68W 4000K	8520lm	1968mm	CE IP40 A++

Optic

Direct / indirect emission with CLD technology diffuser (collimated diffuser UGR<16). Continuous indirect emission.

Specifications

- Built-in Driver;
- CRI>90;
- Mac Adams 3;
- Life Time: L80/B10 >50.000h;
- 5 years complete warranty;
- Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Aluminum extruded body with epoxy powder coating.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.