


A+ 100 C/EW



Part number	3111274
Lampholder:	LED
Light Source:	LED
Wattage:	100 W
Finish:	BK-RAL9005 / Black RAL9005 / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK08 5J xx5
CRI:	80
Kelvin:	4000
Power factor:	COSφ ≥ 0,9
Optic:	Extra wide circle reflector
Lightsource lumen output:	16000 lm
Luminaire lumen output:	13903 lm
L:	L80
B:	B10
Lifetime:	60000 h
Ta MIN luminaire:	-40°
Ta MAX luminaire:	45°

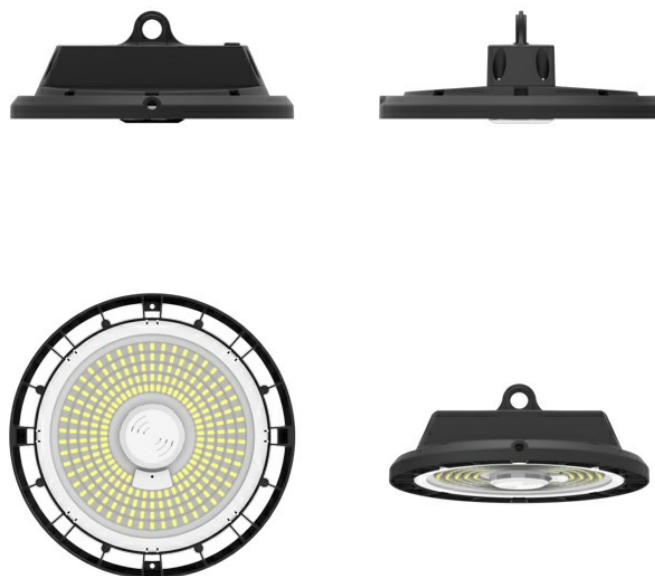

Description

Photometric data




Technical drawings

Suspended LED luminaire for indoor and outdoor industrial applications, comprising:

- Die-cast aluminium housing and trim painted with polyester powder coating after chemical conversion surface treatment
- Diffuser with integrated louvre in UV, heat stabilised, transparent technopolymer
- High resiliency anti-ageing silicone gasket with high elastic return capacity
- 4000 K multichip LED board
- Stainless steel locking screws
- Suspension hook in painted aluminium with safety screw
- Complete with cable H05RN-F
- Built-in driver

Options:

- Painted steel bracket
- Infrared remote control for sensor module
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08



OPTIONAL ACCESSORIES

A+



3111281
Fixing bracket A+100
Black RAL9005

A+ 100




3111019
Polycarbonate diffuser A+ 100


A+ 100 / A+ 150 / A+ 200



3111277
Microwave motion sensor



3111278
Remote control A+



3111279
DALI converter