
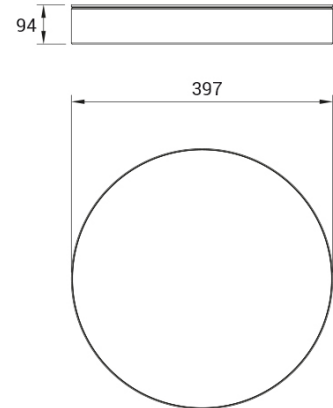


BEN Medium IP54

Frosted Acryl-Satiné impact resistant with perimeter silk-screen printing.

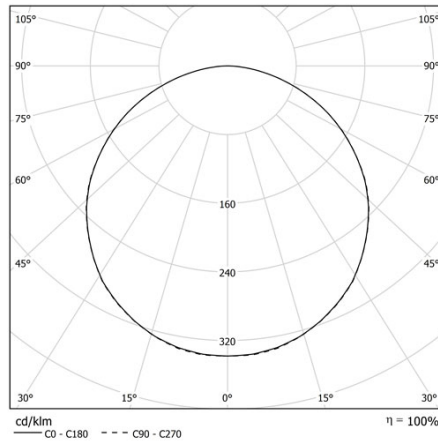

CODE		FLUX	SIZE	CERTIFICATIONS
10PG16K454	16W 4000K	2193lm	Ø 397mm	   

Optics

PG diffuser, frosted Acryl-Satiné and impact resistant with perimeter silk-screen printing, UGR<22.

Specifications

Integrated driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Spun aluminum with epoxy powder coating.

Ingress Protection rating

In case of suspended use, the degree of protection passes from IP54 to IP44.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97