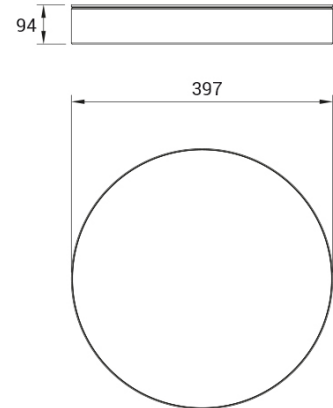
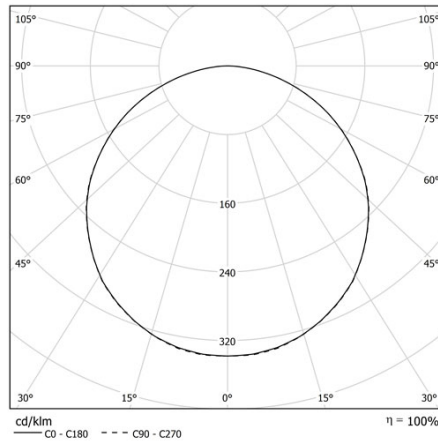





BEN Medium IP54

Frosted Acryl-Satiné impact resistant with perimeter silk-screen printing.



CODE		FLUX	SIZE	CERTIFICATIONS
10PG25K354	25W 3000K	3252lm	Ø 397mm	   

Optics

PG diffuser, frosted Acryl-Satiné and impact resistant with perimeter silk-screen printing, UGR<22.

Body

Spun aluminum with epoxy powder coating.

Specifications

Integrated driver;
CRI>90;
Mac Adams 3;
Life Time: L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009

Ingress Protection rating

In case of suspended use, the degree of protection passes from IP54 to IP44.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97