










FEATURES

-  Direct emission
-  UGR <22
-  IP 44 SOSPENSIONE - IP 54


LED

-  3000K/4000K
-  >125 lm/W
-  CRI >90
-  Eye safety: R60/R61
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  EEA Conformity
-  Energy efficiency
-  5 years warranty

ON REQUEST

-  DALI - code D*
-  Bluetooth - code BT*
-  Emergency 1 hr - code EM*
Emergency 3 hrs - code EM3H*
-  2700K - code K27*

SPECIFICATIONS

Built-in driver.
Impact resistant satin acrylic diffuser with perimeter screen printing and homogeneous emission with UGR <22.
Circular aluminum frame with sealing gasket.

BODY

Aluminum with epoxy powder coating.

COLORS

Matte white RAL 9003 - code B

RELATED PRODUCTS


Ben suspended/ceiling (P. 84)
Ben recessed (P. 124)
Ben wall (P. 249)

* Where available



BEN is the **universal fixture** in **spun aluminium**, for wall, ceiling, suspended or recessed applications. Its high level of ingress protection are offered as standard, making this a truly versatile collection. For applications where low glare is desirable, DPL optics are offered (IP40) which have a glare rating of UGR <19. A satin opal diffuser is also offered for soft broad-beam distribution (UGR <22). This version is also offered as an IP54 for wet area applications. **The LED boards are mounted on circular aluminium frames** for optimum thermal management and the quick-fit connectors facilitate a rapid installation. Dimmable and emergency versions complete the range.

ID 10

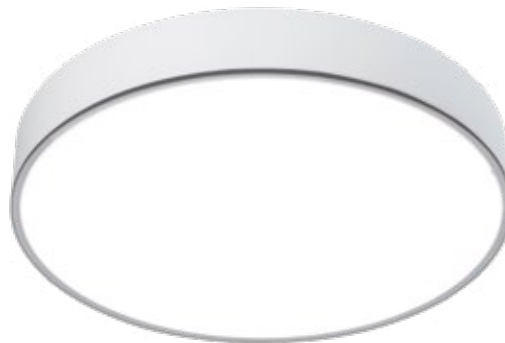

esse-ci

BEN SMALL IP54

Suspended

IP 44

IP 54

Impact resistant satin-acrylic diffuser with perimeter screen printing, UGR <22.



Cod. 4000K	Icon	lm	Ø mm
10PG6K454	6W	824	257
10PG12K454	12W	1647	257
10PG18K454	18W	2471	257

Cod. 3000K	Icon	lm	Ø mm
10PG6K354	6W	783	257
10PG12K354	12W	1564	257
10PG18K354	18W	2352	257


BEN MEDIUM IP54

Suspended

IP 44

IP 54

Impact resistant satin-acrylic diffuser with perimeter screen printing, UGR <22.



Cod. 4000K	Icon	lm	Ø mm
10PG16K454	16W	2412	397
10PG25K454	25W	3766	397

Cod. 3000K	Icon	lm	Ø mm
10PG16K354	16W	2291	397
10PG25K354	25W	3578	397

BEN LARGE IP54

Suspended

IP 44

IP 54

Impact resistant satin-acrylic diffuser with perimeter screen printing, UGR <22.



Cod. 4000K	☼	lm	Ø mm
10PG60K454	60W	8224	620
10PG112K454	112W	15351	620

Cod. 3000K	☼	lm	Ø mm
10PG60K354	60W	7812	620
10PG112K354	112W	14583	620

ACCESSORIES



Single wire adjustable suspension kit. Cable length 1500 / 3000 mm.

10AA13
10AA1330



3 - 5 poles ceiling power supply cable. Cable length 2000mm

10AA16
10AA165P



Kit for recessed frameless installation on plasterboard and concrete.

10AA19SFL - BEN SMALL
10AA19MFL - BEN MEDIUM
10AA19LFL - BEN LARGE



Kit for recessed installation.

10AA19S - BEN SMALL
10AA19M - BEN MEDIUM
10AA19L - BEN LARGE