
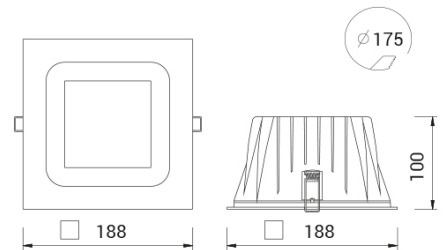






BOX LED MEDIUM

Circular cut-out. IP54 protection from the bottom

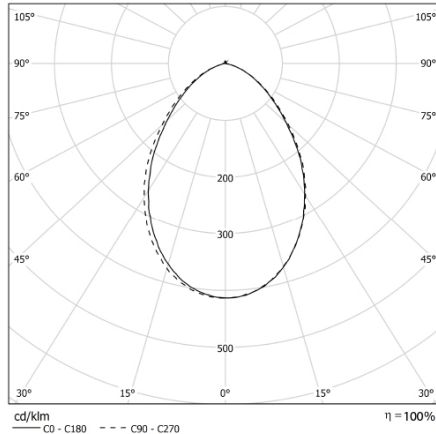

CODE		FLUX	SIZE	CERTIFICATIONS
44MP20K3M54	20W 3000K	1896lm	188mm	  

Optics

Internal polycarbonate reflector and opal microprism polycarbonate diffuser. CUT OFF > 20°.

Specifications

- SMD LED technology;
- Driver included;
- CRI>90;
- Mac Adams 3;
- Life Time: L80/B10 >50.000h;
- 5 years complete warranty;
- Eye safety: RG0/RG1 in accordance with EN62471:2009

Body

Body in die-cast aluminium.

Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97