



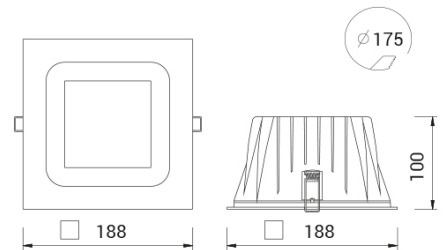


## BOX LED MEDIUM

Circular cut-out. IP54 protection from the bottom

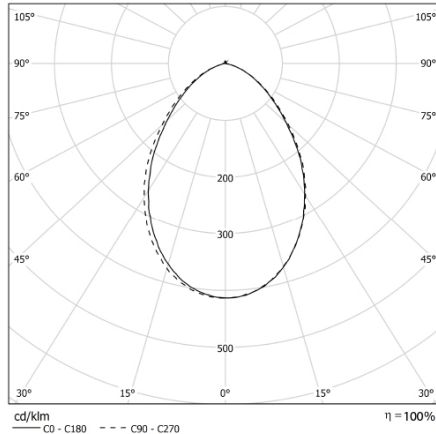

CODE		FLUX	SIZE	CERTIFICATIONS
44MP32K3M54	32W 3000K	3273lm	188mm	  

### Optics

Internal polycarbonate reflector and opal microprism polycarbonate diffuser. CUT OFF > 20°.

### Specifications

SMD LED technology;  
Driver included;  
CRI>90;  
Mac Adams 3;  
Life Time: L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009

### Body

Body in die-cast aluminium.

### Legal reference

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Standard wiring is 230-240V/50-60Hz with power factor >0.97