


BRIGHT DI PG Low Power Double emission

Low power led module. Direct/indirect emission with PG diffuser.

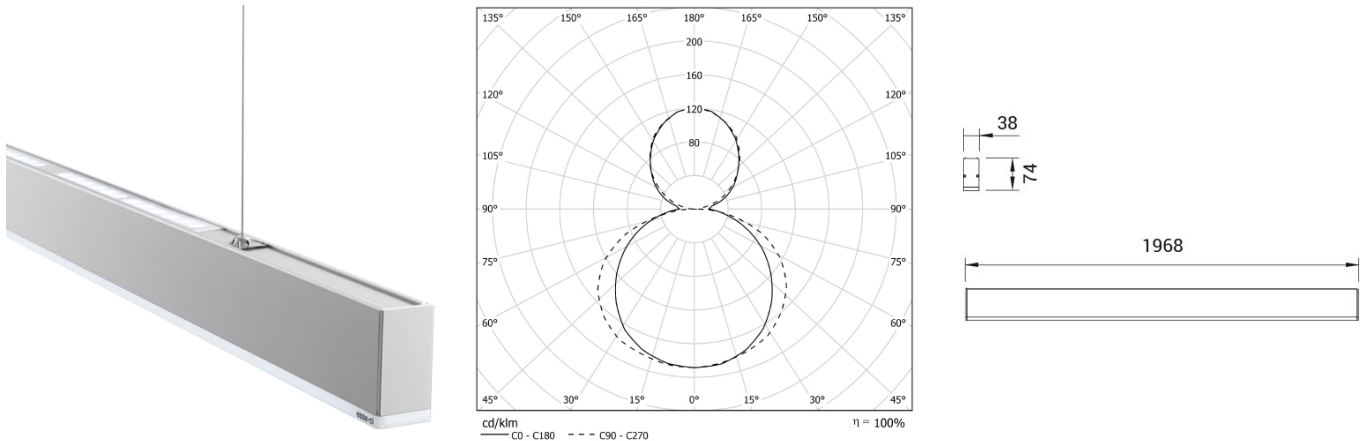

CODE		FLUX	SIZE	CERTIFICATIONS
80DI54PGK4	54W 4000K	5625lm	1968mm	  

Optics

Methacrylate satin antistatic upper diffuser screen, UGR<22.
LIC (Lateral indirect Control) technology for partially indirect emission.
Lower PG metacrilate diffuser for double emission: direct / indirect.

Specifications

integrated driver;
Fixture with end caps included;
CRI>90;
Mac Adams 3;
Life time L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009.

Body

Aluminum extruded body powder coated finish.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.