




## BRIGHT DI PG Low Power Double emission

Low power led module. Direct/indirect emission with PG diffuser.

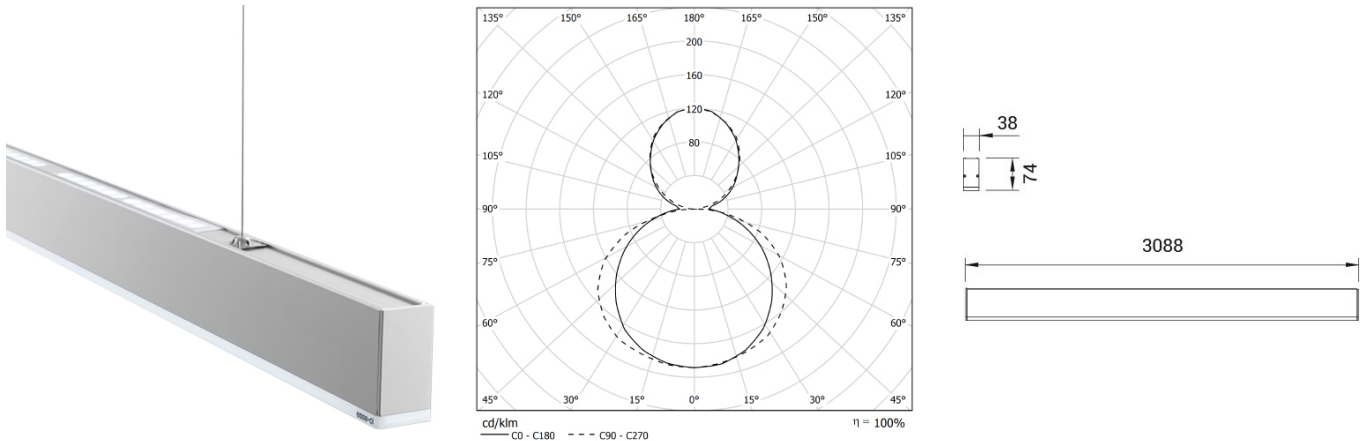

CODE		FLUX	SIZE	CERTIFICATIONS
80DI90PGK4	90W 4000K	9324lm	3088mm	  

### Optics

Methacrylate satin antistatic upper diffuser screen, UGR<22.  
LIC (Lateral indirect Control) technology for partially indirect emission.  
Lower PG metacrilate diffuser for double emission: direct / indirect.

### Specifications

integrated driver;  
Fixture with end caps included;  
CRI>90;  
Mac Adams 3;  
Life time L80/B10 >50.000h;  
5 years complete warranty;  
Eye safety: RG0/RG1 in accordance with EN62471:2009.

### Body

Aluminum extruded body powder coated finish.

### Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

### Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.