




BRIGHT DPL Low Power

Low power led module. Direct emission with Diamond Prism led diffuser.

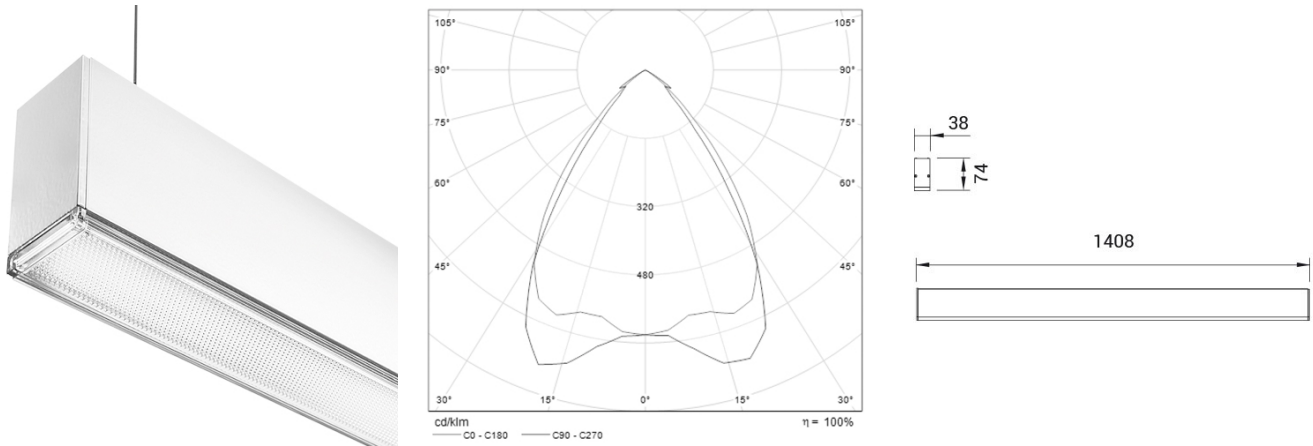

CODE		FLUX	SIZE	CERTIFICATIONS
80DPL30K4	30W 4000K	3120lm	1408mm	  

Optics

Diffuser with Diamond Prism Technology UGR<19 for environments with display screen equipment.
LIC (Lateral indirect Control) technology for partially indirect emission.

Specifications

integrated driver;
Fixture with end caps included;
CRI>90;
Mac Adams 3;
Life time L80/B10 >50.000h;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009.

Body

Aluminum extruded body powder coated finish.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.