


CLY DLS+DETEK

Part number 3116566

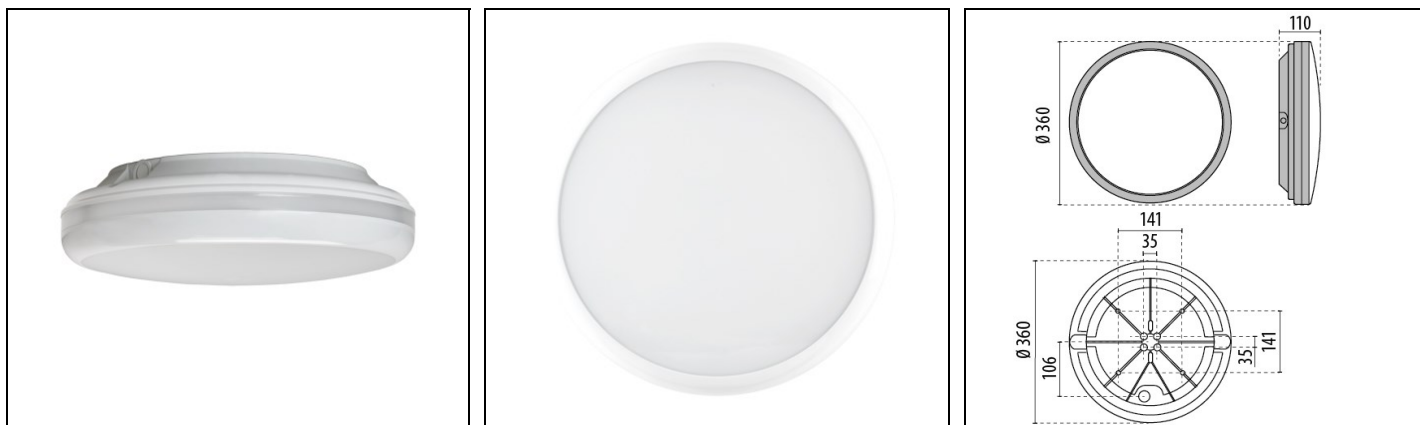

Description

Wall and ceiling mounted luminaire for indoor and outdoor, comprising:

- Technopolymer housing, trim and diffuser
- Anti-ageing custom moulded silicone sealing gasket(s)
- Class II
- Tilting easy-maintenance SMD LED board
- Dip switch for LED CCT control at 3000K or 4000K, field adjustable
- EM/3P version is designed for multipurpose 3 hours sustained emergency lighting
- Hyper-frequency (HF) sensor operating at 5.8 Ghz+/- 75 Mhz
- The DLS+DETEK versions are supplied with an electronic device complete with High Frequency sensor and a daylight sensor (DLS). This is programmed to switch the device on automatically when natural light is low, ensuring constant secure lighting at 30% of the luminous flow and reaching 100% of the flow when any presence is detected
- The luminous flux data shown refer to the maximum power operating level
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Product data

ETIM Group:	EG000027	ETIM Class:	EC002892
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	2534	Luminaire lumen output [lm]:	1695
Luminaire wattage [W]:	17 W	Luminous efficacy [lm/W]:	100
CRI:	80	Kelvin:	3000/4000
Colour / Finish:	WH-87 / White / Matt	IP degree of protection:	IP65
IK-J-xxIP:	IK10 20J xx9	Insulation class:	II
Optic:	SYMMETRIC EXTRA-WIDE	Net weight [kg]:	1.048

Mechanical features

Shape:	ROUND > 300 MM	Housing material:	PLASTIC
Glow wire test [°C]:	650 °C		

Electrical features

Voltage type:	AC	Power factor / COS Φ :	>0.9
Inrush current [A/ μ s]:	8 / 36		


Installation

Application area:	Outdoor	Mounting type:	Bulkheads
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	40

Light features

MacAdam:	3	Lumen maintenance:	L70B10@64000h
Distribution of light emission:	Direct		

Photometric data

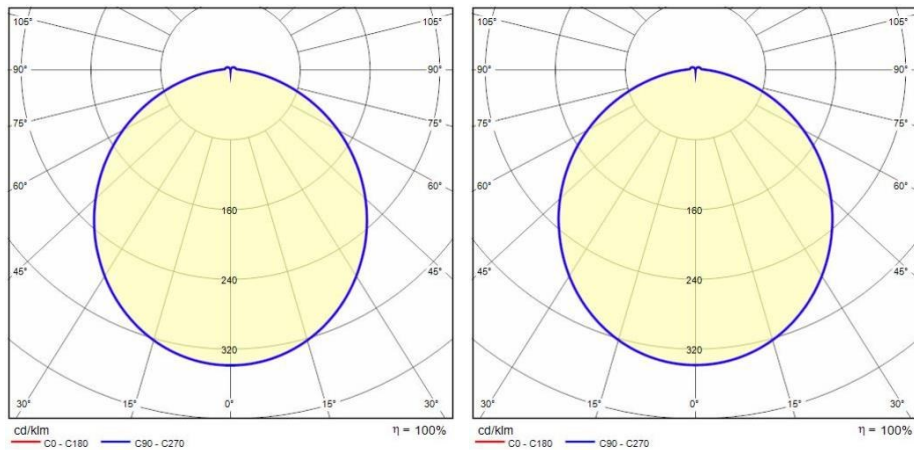

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions