

CRICKET+ 10



Cantina Valetti - Bardolino - Italy




Scan the QR-code for the latest information

- AN-96 / Anthracite gray / Textured
- INOX / Stainless steel / Matt

Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Extra-clear toughened flat safety glass with acid-etched finish (C/EW versions)
- Die-cast aluminium trim powder-coated
- Closing ring in AISI 316 stainless steel with satin finish (stainless steel versions)
- Mains connection through waterproof connection system (WATER-STOP)
- Technopolymer recess box to be ordered separately
- Stainless steel locking hardware
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- RGBW and Tunable White versions to be powered with SELV drivers 48V DC, available as accessories to be ordered separately. Colour management through DMX interface
- DMX signal generator for RGBW and Tunable White versions to be ordered separately
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

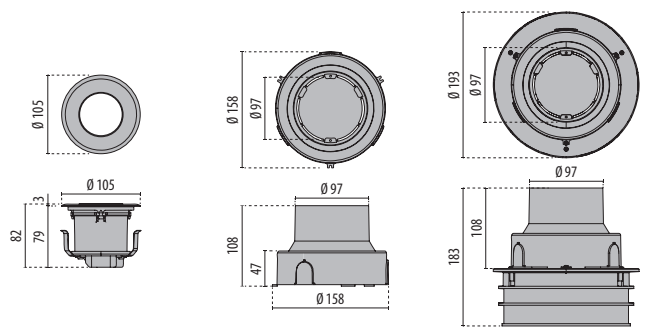


CRICKET+ 10

CRICKET+ 10
(3109879)

CRICKET+ 10 RGBW
(3113571)

Identifying and classifying our optics

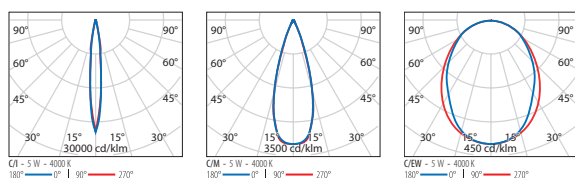

CRICKET+ 10 C/I

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/I	-	475	446	■	3109824
5	I	-	80	3000	C/I	-	440	415	■	3109825
5	I	-	80	4000	C/I	-	475	446	■	3109818
5	I	-	80	3000	C/I	-	440	415	■	3109819

2700K versions are available on web

CRICKET+ 10 C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/M	-	475	436	■	3109822
5	I	-	80	3000	C/M	-	440	406	■	3109823
5	I	-	80	4000	C/M	-	475	436	■	3109816
5	I	-	80	3000	C/M	-	440	406	■	3109817

2700K versions are available on web

CRICKET+ 10 RGBW C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
RGBW LED										
3.5	III	-	80	rgbw 4000	C/M	30°	130	100	■	3112274
3.5	III	-	80	rgbw 4000	C/M	30°	130	100	■	3112273

2700K versions are available on web

CRICKET+ 10 TW C/M

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
TunableWhite Power LED										
6	III	-	80	tw 2700-5700	C/M	30°	440	310	■	3112277
6	III	-	80	tw 2700-5700	C/M	30°	440	310	■	3112276

2700K versions are available on web

CRICKET+ 10 C/EW

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/EW	-	475	278	■	3109820
5	I	-	80	3000	C/EW	-	440	130	■	3109821
5	I	-	80	4000	C/EW	-	475	142	■	3109814
5	I	-	80	3000	C/EW	-	440	130	■	3109815

2700K versions are available on web

Control gear

DESCRIPTION	COLOR	PART NUMBER
CRICKET+ 10 RGBW / CRICKET+ 10 TW		
Driver - CV 500 W - 48 V kit		310951
Driver - CV 100 W - 48 V kit		310950
Controller DMX touch white		3117844
Controller DMX touch black		3117845




310951




310950

Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER
CRICKET+ 10		
Recessed box		3109879
CRICKET+ 10 RGBW		
Recessed box CRICKET+ 10 RGBW/TW		3113571



3109879



3113571

CRICKET+ 10 MARINE




■ BR-10 / Natural brass / Glossy



Scan the QR-code for the latest information


Series of reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate optics
- Anti-ageing custom moulded silicone sealing gasket(s) with resilient elastic return capacity
- Extra clear, toughened, flat glass diffuser
- Extra-clear toughened flat safety glass with acid-etched finish (C/EW versions)
- Closing ring in marine brass with polished finish ISO 9223 (CX)
- Mains connection through waterproof connection system (WATER-STOP)
- Technopolymer recess box to be ordered separately
- Stainless steel locking hardware
- Floor mounted luminaires are usually subject to harsh conditions. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- RGBW and Tunable White versions to be powered with SELV drivers 48V DC, available as accessories to be ordered separately. Colour management through DMX interface
- DMX signal generator for RGBW and Tunable White versions to be ordered separately
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

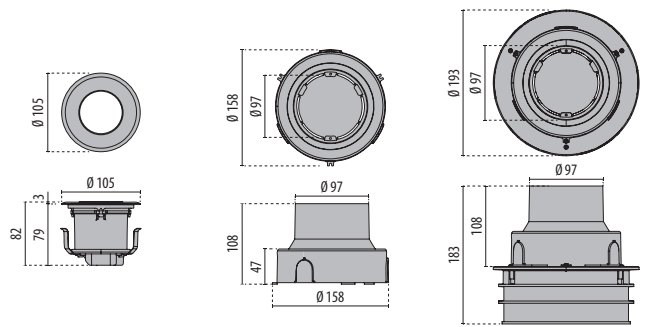



CRICKET+ 10 MARINE (3109879) CRICKET+ 10 MARINE RGBW / TW (3113571)

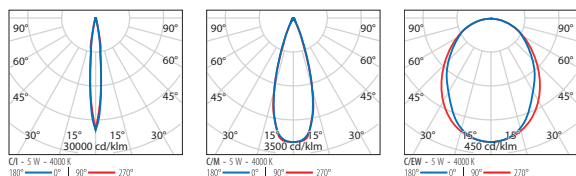Identifying and classifying our optics



CRICKET+ 10 C/I MARINE

IP67 - IK08 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/I	-	475	446		3109830
5	I	-	80	3000	C/I	-	440	415		3109831

2700K versions are available on web



CRICKET+ 10 C/M MARINE


IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/M	-	475	436		3109828
5	I	-	80	3000	C/M	-	440	406		3109829

2700K versions are available on web

CRICKET+ 10 RGBW C/M MARINE

IP67 - IK08 - 650 °C


LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
RGBW LED										
3.5	III	-	80	rgbw 4000	C/M	30°	130	100		3112275

2700K versions are available on web



CRICKET+ 10 TW C/M MARINE

IP67 - IK08 - 650 °C



LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
TunableWhite Power LED										
6	III	-	80	tw 2700-5700	C/M	30°	440	310		3112282

2700K versions are available on web



CRICKET+ 10 C/EW MARINE

IP67 - IK08 - 650 °C

LUMINAIRE WATTAGE (W)	CLASS	ENEC	CRI	KELVIN	OPTIC	BEAM ANGLE	LIGHTSOURCE LUMEN OUTPUT (lm)	LUMINAIRE LUMEN OUTPUT (lm)	COLOUR / FINISH	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5	I	-	80	4000	C/EW	-	475	142		3109826
5	I	-	80	3000	C/EW	-	440	132		3109827

2700K versions are available on web




Control gear

DESCRIPTION	COLOR	PART NUMBER
CRICKET+ 10 MARINE RGBW / CRICKET+ 10 MARINE TW		
Driver - CV 100 W - 48 V kit		310950
Driver - CV 500 W - 48 V kit		310951
Controller DMX touch white		3117844
Controller DMX touch black		3117845




310950




310951

Mandatory accessories

DESCRIPTION	COLOR	PART NUMBER
CRICKET+ 10 MARINE		
Recessed box CRICKET+ 10 MARINE		3109879
CRICKET+ 10 MARINE RGBW / CRICKET+ 10 MARINE TW		
Recessed box CRICKET+ 10 MARINE RGBW/TW		3113571



3109879



3113571