

POLO D53 / D53 POLO/T1 / POLO/T190 LED / D53/T190-84-AL

Product Info




Item code	POLO D53 / D53/T190-84-AL
Category	Bollard
Environments	residential lighting, hallway, urban landscape
Mounting type	ground surface
Mounting note	Supplied complete with a kit of bolts for ground anchoring.
Body	Corrosion resistant extruded aluminium post. Corrosion resistant die-cast aluminium body. Corrosion resistant aluminium ground fixing base.
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Seals	EPDM and Silicone Rubber Gaskets.
Standard Colour	AL aluminium grey
Option colors	GR graphite satin finish




Dimensions

Total device height (mm)	900
D: Total diameter device (mm)	100





Optical System

Optical System	Unbreakable anti UV polycarbonate diffusers.
Beam	diffuse
Emission	radial
Adjustable	No



Photometrics

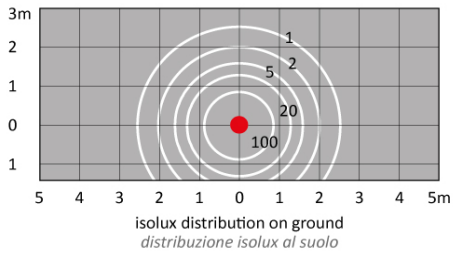

Sources


MacAdam	Step 3
Output Flux	493 lm
Source type	LED COB
Source power	10W
Temperature Colour	4000K CRI>80

Electrical

Ballast type	ON-OFF.
Frequency	50-60Hz
Lifetime	50.000h L80B20 (Ta=25°C)
Line input	Internal looping facility 3x4mm ² terminal, use only (EN 60598-1) cable type H07RN-F with diameter between 7,5 and 12mm.
Mounting ballast type	Integral
Voltage	220-240V
Separate ignition	No
Emergency 1E	No
Emergency 3E	No

Optional Accessories

Mounting

**D53/1-TF**

For models: D53 polo/T1, D58 box/B0/B1 and PLANO bollard. Counter plate with stay bolts.

Optical

**D53/T1-SO**

Darkening sector -180° wide.