

DL ROUND MIDI




Part number	3108960
Lampholder:	LED
Light Source:	LED
Wattage:	9 W
Finish:	SL-10 / Silver / Textured
Insulation class:	I
Degree of protection:	IP20
IK-J-xxIP:	IK07 2J xx5
CRI:	80
Kelvin:	4000
Power factor:	COS ϕ \geq 0,9
Optic:	Extra wide circle reflector
Optic Beam:	2 x 41°
Lightsource lumen output:	1500 lm
Luminaire lumen output:	1280 lm
L:	L80
B:	B10
Lifetime:	50000 h
Ta MIN luminaire:	10°
Ta MAX luminaire:	40°




Description



- Recessed, modular, round LED downlight for indoor, comprising:
- LED module, die-cast aluminium heat sink, reflector with integrated ceiling trim, diffuser and external supply unit
 - All components can be tool-less replaced lately
 - Integrated diffuser with optimum diffusion for a very high level of uniformity
 - Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
 - Built-in driver
 - DALI dimmable
 - Suitable for ceiling tile thickness from 1-25 mm
 - Quick installation without tools
 - Wieland connector
- Options:
- High-shine modular radial louvre reflector with integrated ceiling frame made of metallised injection-moulded ABS with light-tight connection to LED module
 - Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module and matte plastic pane (IP54)

Photometric data

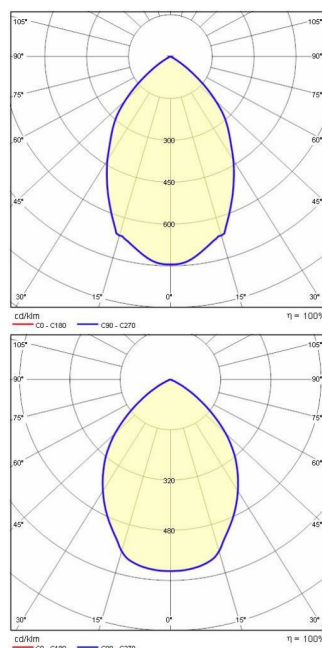

Technical drawings





OPTIONAL ACCESSORIES

DL ROUND MIDI



3109008
LOUVRE DL ROUND MIDI



3109009
WHITE OPTIC IP54 DL ROUND MIDI



3109007
BLACK REFLECTOR DL ROUND MIDI