

## DL ROUND MIDI



<b>Part number</b>	3108964
<b>Lampholder:</b>	LED
<b>Light Source:</b>	LED
<b>Wattage:</b>	13 W
<b>Finish:</b>	SL-10 / Silver / Textured
<b>Insulation class:</b>	I
<b>Degree of protection:</b>	IP20
<b>IK-J-xxIP:</b>	IK07 2J xx5
<b>CRI:</b>	90
<b>Kelvin:</b>	3000
<b>Power factor:</b>	1
<b>Optic:</b>	Extra wide circle reflector
<b>Optic Beam:</b>	2 x 41°
<b>Lightsource lumen output:</b>	1900 lm
<b>Luminaire lumen output:</b>	1640 lm
<b>L:</b>	L80
<b>B:</b>	B10
<b>Lifetime:</b>	50000 h
<b>Ta MIN luminaire:</b>	10°
<b>Ta MAX luminaire:</b>	40°




### Description


- Recessed, modular, square LED downlight for indoor, comprising:
- LED module, die-cast aluminium heat sink, reflector with integrated ceiling trim, diffuser and external supply unit
  - All components can be tool-less replaced lately
  - Integrated diffuser with optimum diffusion for a very high level of uniformity
  - Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology"
  - Built-in driver
  - Suitable for ceiling tile thickness from 1-25 mm
  - Quick installation without tools




- Options:
- High-shine modular radial louvre reflector with integrated ceiling frame made of metallised injection-moulded ABS with light-tight connection to LED module
  - Reflector with integrated ceiling trim made of injection-moulded ABS in white with light-tight connection to LED module and matte plastic pane (IP54)

### Photometric data

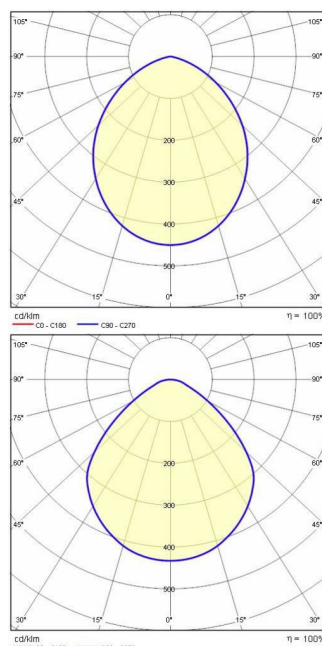


### Technical drawings





## OPTIONAL ACCESSORIES

### DL ROUND MIDI



3109006  
White reflector DL ROUND MIDI



3109007  
BLACK REFLECTOR DL ROUND MIDI



3109008  
LOUVRE DL ROUND MIDI



3109009  
WHITE OPTIC IP54 DL ROUND MIDI