





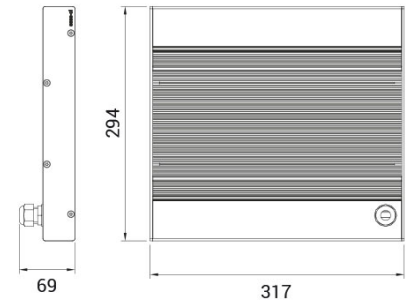

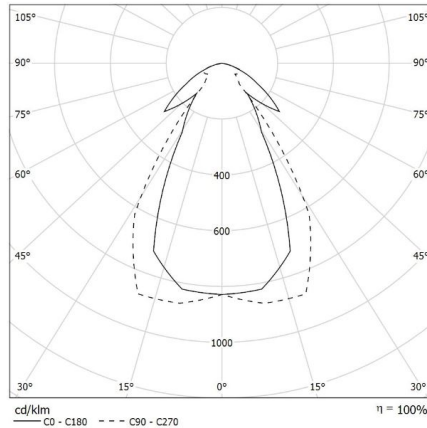

ERGO GP

Anodized aluminum body and die-cast end caps. CRI>90. IP65 indoor.



CODE		FLUX	SIZE	CERTIFICATIONS
02GP86K465	86W 4000K	9237lm	317x294x69	    

Optics

Polycarbonate lens, symmetrical distribution. Additional protection grid.

Specifications

Integrated driver;
CRI>90;
McAdams 3;
Life Time: L80/B10 >50.000h;
IK10;
5 years complete warranty;
Eye safety: RG0/RG1 in accordance with EN62471:2009;
Temperature range: -25° / +45°

Body

Anodized aluminum body and die-cast end caps.

Legal references

In compliance with the safety standards EN 60 598-1 and UNI EN 12464-1 (lighting for working places).

Wiring

RE: Built-in wiring 230-240V/50-60Hz with power factor >0.97.